




LSD Series Low Profile Type Linear Guide

Product Introduction

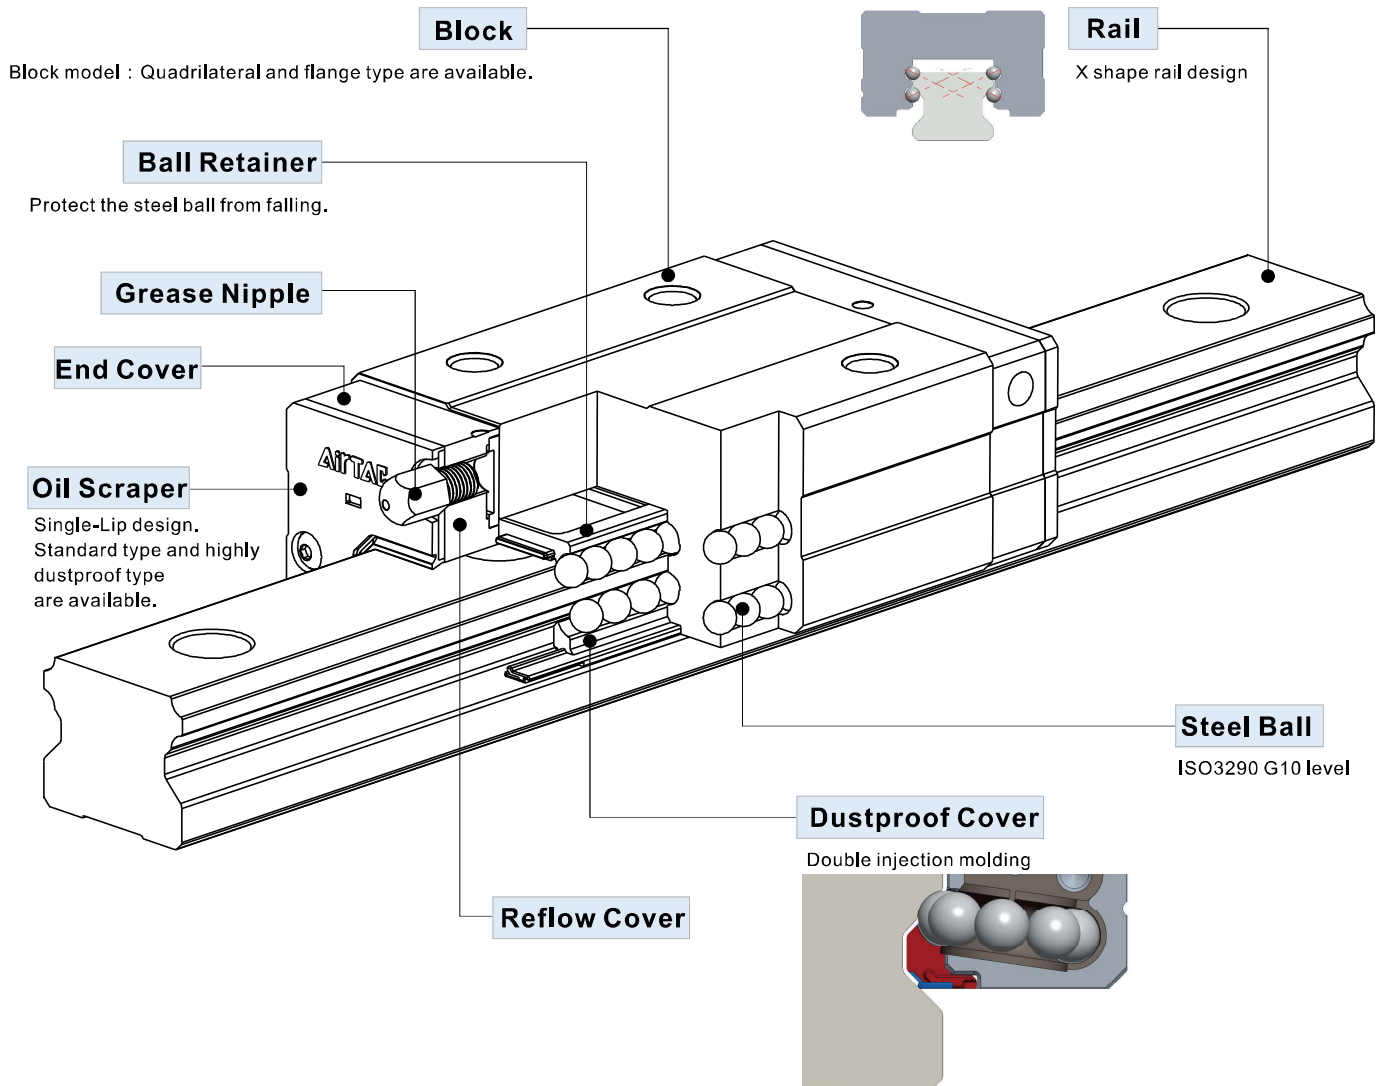

Product Features

1. With self-adjustment ability

X-shaped (45° - 45°) of curved groove on cross section design makes it self-aligning. Even small misalignment exists on the mounting surface, this design can help absorb it and maintain high precision, smooth and stable linear motion.

2. Low profile, High rigidity, equal load on four direction design

The 45-degree contact angle design of the four rows of steel balls and the raceway allow the steel balls to achieve the ideal two-point contact, and can withstand the action and reaction force from the radial and lateral direction. Meanwhile, pre-load can be applied to increase extra rigidity if necessary. Reduce the combined height of the slide block and the slide rail, shorten the length of the slide block, to achieve miniaturization.

3. Interchangeable

Because of the strict control on manufacturing process, the dimensional accuracy is stable and within the set tolerance.

Besides, the ball retainer design can prevent steel balls from falling out. Therefore when assembling, blocks are interchangeable within the same spec and still maintain consistency of pre-load and accuracy.



Low Profile Type Linear Guide

LSD Series



Order Information(Combined)

1、LSD15/30

LSD □ 15 H N 1 X 220 S20 A H - U - AM6 - B - T

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭

① Model Code	LSD:Low Profile Type Linear Guide			
② Rail&Block surface treatment	Blank: without additional coating. (natural color) ★BB: Block and rail coated with black chrome			
③ Rail Width	15:15mm 30:28mm			
④ Block Style	H: Square type F1: Flange type, Mounting from top F2: Flange type, Mounting from bottom F3: Flange type, Mounting from top or bottom			
⑤ Block type	S: Short N: Standard			
⑥ Number of Block	1: One 2: Two [Note: Amount of block on a single set of linear guide]			
⑦ Length of Rail	220:220mm[Defined by customer]			
⑧ Position of first mounting hole	S□ : Distance from end of rail to the center of first mounting hole (It is recommended to be greater than minimum margin)			
⑨ Preload	A: Standard clearance B: Light Preload C: Medium Preload			
⑩ Accuracy	N : Normal H : High P : Precision			
⑪ Rail type	LSD15:Blank: Top-mount(M4)		LSD15:U: Top-mount(M3)	
	LSD30:Blank: Top-mount(M6)		LSD30:U: Top-mount(M8)	
⑫ Nipple /adapter type	LSD15: M4: M4 Nipple		LSD15: AM6: M4 to M6	
	LSD30: M6: M6 Nipple		LSD30: A01: M6 to PT1/8 L01: M6 to PT1/8 SM6: M6 Nipple	
⑬ Packing type	Blank: the block and rail are assembled B: block and rail are put separately		Blank: the block and rail are assembled B: block and rail are put separately	
	Blank: Top-mount T: Bottom-mount		Blank: Top-mount T: Bottom-mount	

★[Note 1] Dustproof standard type please refer to Pg. 50. for more detail.

★[Note 2] Self-lubricator standard type please refer to Pg. 56. for more detail.

[Note 3] For LSD-BB series, standard length of a rail is 3 m.

Please contact with our company if length of rail exceeds the maximum.

Add: Rail type indicated in ⑩ and ⑪ in ordering code cannot be selected at the same time, only one of them can be selected.

Low Profile Type Linear Guide

LSD Series

2、LSD20/25/35

LSD □ 20 H N 1 X220 S20 A H - AM8 - B - T

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

① Model Code	LSD:Low Profile Type Linear Guide			
② Rail&Block surface treatment	Blank: without additional coating. (natural color) ★BB: Block and rail coated with black chrome			
③ Rail Width	20:20mm 25:23mm 35:34mm			
④ Block Style	H: Square type F1: Flange type, Mounting from top F2: Flange type, Mounting from bottom F3: Flange type, Mounting from top or bottom			
⑤ Block type	S: Short N: Standard			
⑥ Number of Block	1: One 2: Two [Note: Amount of block on a single set of linear guide]			
⑦ Length of Rail	220:220mm[Defined by customer]			
⑧ Position of first mounting hole	S□ : Distance from end of rail to the center of first mounting hole (It is recommended to be greater than minimum margin)			
⑨ Preload	A: Standard clearance B: Light Preload C: Medium Preload			
⑩ Accuracy	N : Normal H : High P : Precision			
⑪ Nipple /adapter type	M6:M6 Nipple	A01:M6 to PT1/8 AM8:M6 to M8	L01:M6 to PT1/8 LM8:M6 to M8	SM6: M6 Nipple
		I type 	L type 	SM6 
⑫ Packing type	Blank: the block and rail are assembled B: block and rail are put separately			
⑬ Rail type	Blank: Top-mount T: Bottom-mount			

- ★[Note 1] Dustproof standard type please refer to Pg. 50. for more detail.
 ★[Note 2] Self-lubricator standard type please refer to Pg. 56. for more detail.
 [Note 3] For LSD-BB series, standard length of a rail is 3 m.
 Please contact with our company if length of rail exceeds the maximum.

Low Profile Type Linear Guide

LSD Series

Butt-jointed Order Information

1、LSD15/30

LSD □ 15 H N 1X2970 T 2940T2970 A H-U- AM6-B -T

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰

Butt-jointed end margin: 1/2P ,
Position of the first and last
hole is defined by customer.

① Model Code	LSD:Low Profile Type Linear Guide			
② Rail&Block surface treatment	Blank: without additional coating. (natural color) ★BB: Block and rail coated with black chrome			
③ Rail Width	15:15mm 30:28mm			
④ Block Style	H: Square type F1: Flange type, Mounting from top F2: Flange type, Mounting from bottom F3: Flange type, Mounting from top or bottom			
⑤ Block type	S: Short N: Standard			
⑥ Number of Block	1: One 2: Two [Note: Amount of block on a single set of linear guide]			
⑦ Length of first Rail	2970:2970mm[Defined by customer]			
⑧ Butt-jointed mark	T: Rail Butt-jointed mark(Butt-jointed end margin:1/2P) [P is the standard hole distance]			
⑨ Length of second Rail	2940:2940mm[Defined by customer]			
⑩ Butt-jointed mark	Blank: two rails joint T: Rail Butt-jointed mark (Butt-jointed end margin:1/2P) [P is the standard hole distance]			
⑪ Length of third Rail	Blank: two rails joint 2970:2970mm..[Defined by the customer]			
⑫ Preload	A: Standard clearance B: Light Preload C: Medium Preload			
⑬ Accuracy	N : Normal H : High			
⑭ Rail type	LSD15:Blank: Top-mount(M4)		LSD15:U: Top-mount(M3)	
	LSD30:Blank: Top-mount(M6)		LSD30:U: Top-mount(M8)	
	LSD15	LSD30	LSD15	LSD30
⑮ Nipple /adapter type	LSD15: M4: M4 Nipple		LSD15: LM6: M4 to M6	
	LSD30: M6: M6 Nipple		LSD30: L01: M6 to PT1/8	
	LSD30: AM8: M6 to M8		LSD30: LM8: M6 to M8	
	 M4	 M6	 I type	 L type
⑯ Packing type	Blank: the block and rail are assembled B: block and rail are put separately			
⑰ Rail type	Blank: Top-mount T: Bottom-mount			

- ★[Note 1] Dustproof standard type please refer to Pg. 50. for more detail.
★[Note 2] Self-lubricator standard type please refer to Pg. 56. for more detail.

[Note 3] For LSD-BB series, standard length of a rail is 3 m.

Maximum length of two-joint rail is 6 m.

Maximum length of three-joint rail is 9 m.

Please contact with our company
if length of rail exceeds the maximum.

Add1 : Number of joints cannot be more than 2 times(three rails at most).

For LSD15, maximum length of jointed rail is 12080mm.

For LSD30, it's 12030.

Customization is needed for joint times more than standard.

Add2 :Rail type indicated in ⑭ and ⑰ in ordering code cannot be selected
at the same time, only one of them can be selected.

Low Profile Type Linear Guide

LSD Series

2、LSD20/25/35

LSD □ 20 H N 1X2970T2940T2970A H-AM8-B-T

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

Butt-jointed end margin:1/2P ,
Position of the first and last
hole is defined by customer.

① Model Code	LSD:Low Profile Type Linear Guide			
② Rail&Block surface treatment	Blank: without additional coating. (natural color) ★BB: Block and rail coated with black chrome			
③ Rail Width	20:20mm	25:23mm	35:34mm	
④ Block Style	H: Square type F1: Flange type, Mounting from top F2: Flange type, Mounting from bottom F3: Flange type, Mounting from top or bottom			
⑤ Block type	S: Short N: Standard			
⑥ Number of Block	1: One 2: Two [Note: Amount of block on a single set of linear guide]			
⑦ Length of first Rail	2970:2970mm[Defined by customer]			
⑧ Butt-jointed mark	T: Rail Butt-jointed mark (Butt-jointed end margin:1/2P) [P is the standard hole distance]			
⑨ Length of second Rail	2940:2940mm[Defined by customer]			
⑩ Butt-jointed mark	Blank: two rails joint T: Rail Butt-jointed mark (Butt-jointed end margin:1/2P) [P is the standard hole distance]			
⑪ Length of third Rail	Blank: two rails joint 2970:2970mm..[Defined by the customer]			
⑫ Preload	A: Standard clearance B: Light Preload C: Medium Preload			
⑬ Accuracy	N : Normal H : High			
⑭ Nipple /adapter type	M6: M6 Nipple	A01: M6 to PT1/8 AM8: M6 to M8	L01: M6 to PT1/8 LM8: M6 to M8	SM6: M6 Nipple
		I type 	L type 	SM6 
⑮ Packing type	Blank: the block and rail are assembled B: block and rail are put separately			
⑯ Rail type	Blank: Top-mount T: Bottom-mount			

- ★[Note 1] Dustproof standard type please refer to Pg. 50. for more detail.
★[Note 2] Self-lubricator standard type please refer to Pg. 56. for more detail.

[Note 3] For LSD-BB series, standard length of a rail is 3 m.

Maximum length of two-joint rail is 6 m.

Maximum length of three-joint rail is 9 m.

Please contact with our company
if length of rail exceeds the maximum.

Add: Number of joints cannot be more than 2 times(three rails at most).

For LSD20/25, maximum length of jointed rail is 12080mm.

For LSD35, it's 12030.

Customization is needed for joint times more than standard.


Low Profile Type Linear Guide

LSD Series


1. Block Order Information

LSD □ 15 BK - H N - H - D - AM6

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



S: Short



N: Standard

★ [Note 1] Dustproof standard type please refer to Pg. 50. for more detail.

★ [Note 2] Self-lubricator standard type please refer to Pg. 56. for more detail.

[Note 3] When selecting rails and bearings, the different pairing codes can change the units preload, details see "preload pairing chart".

① Model Code	LSD:Low Profile Type Linear Guide					
② Coating on block	Blank: Block without additional coating, (natural color) ★B: Block coated with black chrome					
③ Rail Width	15:15mm	20:20mm	25:23mm	30:28mm	35:34mm	
④ Block Code	BK: Block					
⑤ Block Style	H: Square type F1: Flange type, Mounting from top F2: Flange type, Mounting from bottom F3: Flange type, Mounting from top or bottom					
⑥ Block type	S: Short N: Standard					
⑦ Accuracy	N: Normal H: High					
⑧ Group code	SD SC SB B D [Note3]					
⑨ Nipple /adapter type	15	M4	M4 Nipple		M6	M6 Nipple
		AM6	M4 to M6	I type	A01	M6 to PT1/8 I type
					AM8	M6 to M8
				L type	L01	M6 to PT1/8 L type
		LM6	M4 to M6		LM8	M6 to M8
					SM6	M6 Nipple


2. Rail Order Information

(1) LSD15/30

LSD 15 RL X 4000 - H - D - U

① ② ③ ④ ⑤ ⑥ ⑦

① Model Code	LSD:Low Profile Type Linear Guide			
② Rail Width	15:15mm 30:28mm			
③ Rail Code	RL: Rail			
④ Rail Length	15 : 4040mm 30 : 4030mm			
⑤ Accuracy	N: Normal H: High			
⑥ Group code	D [Note]			
⑦ Rail type	LSD15: Blank: Top-mount(M4)		LSD15: U: Top-mount(M3)	
	LSD30: Blank: Top-mount(M6)		LSD30: U: Top-mount(M8)	
	LSD15	LSD30	LSD15	LSD30



Note: •For LSD15, both margin pitch of rail are 40mm.

•For LSD30, both margin pitch of rail are 55mm.


•When selecting rails and bearings, the different pairing codes can change the units preload, details see "preload pairing chart".

(2) LSD20/25/35

LSD 20 RL X 4000- H - D - T

① ② ③ ④ ⑤ ⑥ ⑦

① Model Code	LSD:Low Profile Type Linear Guide			
② Rail Width	20:20mm 25:23mm 35:34mm			
③ Rail Code	RL: Rail			
④ Rail Length	20 : 4040mm 25 : 4040mm 35 : 4030mm			
⑤ Accuracy	N: Normal H: High			
⑥ Group Code	D [Note]			
⑦ Rail type	Blank: Top-mount T: Bottom-mount			



Note: •For LSD20/25, both margin pitch of rail are 40mm.

•For LSD35, both margin pitch of rail are 55mm.

•When selecting rails and bearings, the different pairing codes can change the units preload, details see "preload pairing chart".


Low Profile Type Linear Guide

LSD Series

3. Rail Order Information

(1) LSD15/30

LSD □ 15 RL X 220-S20 - H - D - U

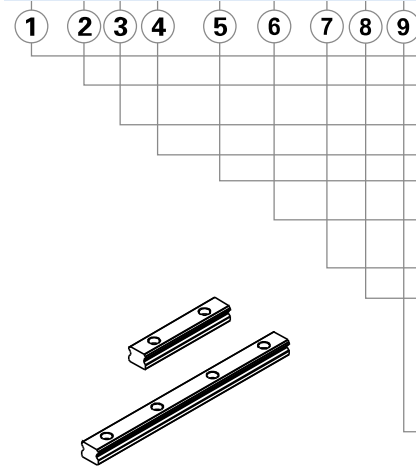


Note: 1. When selecting rails and bearings, the different pairing codes can change the units preload, details see "preload pairing chart".
2. For LSD-B series, standard length of a rail is 3 m.

① Model Code	LSD: Low Profile Type Linear Guide		
② Coating on rail	Blank: Rail without additional coating. (natural color) ★B: Rail coated with black chrome		
③ Rail Width	15: 15mm 30: 28mm		
④ Rail Code	RL: Rail		
⑤ Rail Length	220: 220mm [Defined by customer]		
⑥ Position of first mounting hole	S □ : Distance from end of rail to the center of first mounting hole (It is recommended to be greater than minimum margin) [Standard margin pitch is 20mm]		
⑦ Accuracy	N: Normal H: High		
⑧ Group code	D		
⑨ Rail type	LSD15: Blank: Top-mount(M4)	LSD15: U: Top-mount(M3)	T: Bottom-mount
	LSD30: Blank: Top-mount(M6)	LSD30: U: Top-mount(M8)	
	LSD15 Φ8 Φ4.8	LSD30 Φ11.2 Φ7	
	LSD15 Φ6 Φ3.5	LSD30 Φ14.2 Φ9	

(2) LSD20/25/35

LSD □ 20 RL X 220-S20 - H - D - T

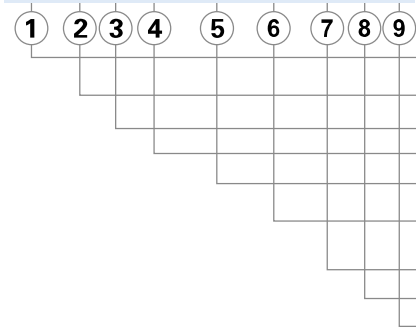

Note: 1. When selecting rails and bearings, the different pairing codes can change the units preload, details see "preload pairing chart".
2. For LSD-B series, standard length of a rail is 3 m.

① Model Code	LSD: Low Profile Type Linear Guide		
② Coating on rail	Blank: Rail without additional coating. (natural color) ★B: Rail coated with black chrome		
③ Rail Width	20: 20mm 25: 23mm 35: 34mm		
④ Rail Code	RL: Rail		
⑤ Rail Length	220: 220mm [Defined by customer]		
⑥ Position of first mounting hole	S □ : Distance from end of rail to the center of first mounting hole (It is recommended to be greater than minimum margin) [Standard margin pitch is 20mm]		
⑦ Accuracy	N: Normal H: High		
⑧ Group code	D [Note]		
⑨ Rail type	Blank: Top-mount T: Bottom-mount		


4. Rail/Block preload pairing chart

When customer orders rail/block, please choose the pairing code of rail/block in accordance with the needed preload of linear guide(combined). Details please refer to the "preload pairing chart".

Model	Rail pairing code	Block pairing code	Preload grade	Model	Rail pairing code	Block pairing code	Preload grade	Model	Rail pairing code	Block pairing code	Preload grade
LSD15	D	D	Standard clearance	LSD30	D	D	Standard clearance	LSD35	D	D	Standard clearance
LSD20		B	Light preload			B	Light preload			B	Light preload
LSD25		SB	Medium preload			SC	Medium preload			SD	Medium preload

Accessory Order Code

L - P - AM6 - □

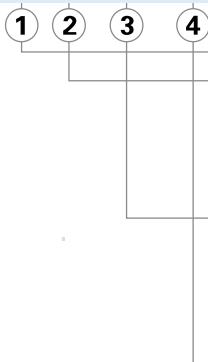

①Accessory Code		L: Linear Guide Accessory										
②Nipple/adaptor Code		P: Nipple/adaptor										
③Nipple/adaptor type	15	M4	M4 Nipple		20 25 30 35	M6	M6 Nipple					
		AM6	M4 to M6			I type			A01	M6 to PT1/8	I type	
				AM8				M6 to M8				
				L01				M6 to PT1/8	L type			
				LM8				M6 to M8				
		LM6	M4 to M6	L type			SM6	M6 Nipple				
④Block type		Blank: Standard ZZ: For LSD15/25/30/35 series highly dustproof block (both DD and ZZ type) ZZLSD20: For LSD20 series highly dustproof block (both DD and ZZ type)										


Low Profile Type Linear Guide

LSD Series

Rail Specification

1.The maximum length of a single rail , please refer to the table for more detail about edge pitch of first mounting hole (S) and last mounting hole (E).
2.The edge pitch of first mounting hole (S) and last mounting hole (E) should not be greater than 1/2P. Overlong edge may induce unstable installation and affect the accuracy.

n: Numbers of mounting holes



$$L=(n-1) \times P+S+E$$

L: Total length of rail(mm)

n: Numbers of mounting holes on rail

P:Distance between bolt holes(mm)

S:Edge of first mounting hole(mm)

E:Edge of last mounting hole(mm)


Model	LSD15	LSD20	LSD25	LSD30	LSD35
Pitch(P)	60	60	60	80	80
Standard Edge Pitch(S/E)	40	40	40	55	55
Min. Edge Pitch(S/E min)	5(4)	6	7	7(8)	8
Max. Edge Pitch(S/E max)	55(56)	54	53	73(72)	72
Maximum length(Lmax)	4040	4040	4040	4030	4030

Note:

- For LSD15 when it mounted with M3 screw, Min.edge pitch is 4mm, Max.edge pitch is 56mm.
For LSD15 when it mounted with M4 screw, Min.edge pitch is 5mm, Max. edge pitch is 55mm.
- For LSD30 when it mounted with M6 screw, Min.edge pitch is 7mm, Max. edge pitch is 73mm.
For LSD30 when it mounted with M8 screw, Min.edge pitch is 8mm, Max. edge pitch is 72mm.
- Joint rail must be chosen if length of rail exceeds the maximum.
- When deciding edge pitch, it should be within the range of above table.
There would be risk of broken hole if pitch is out of range.
- Maximum length of rail for standard' means the maximum length of rail can be chosen when both sides of edge pitches are standard.

Specifications and Dimensions

Square type

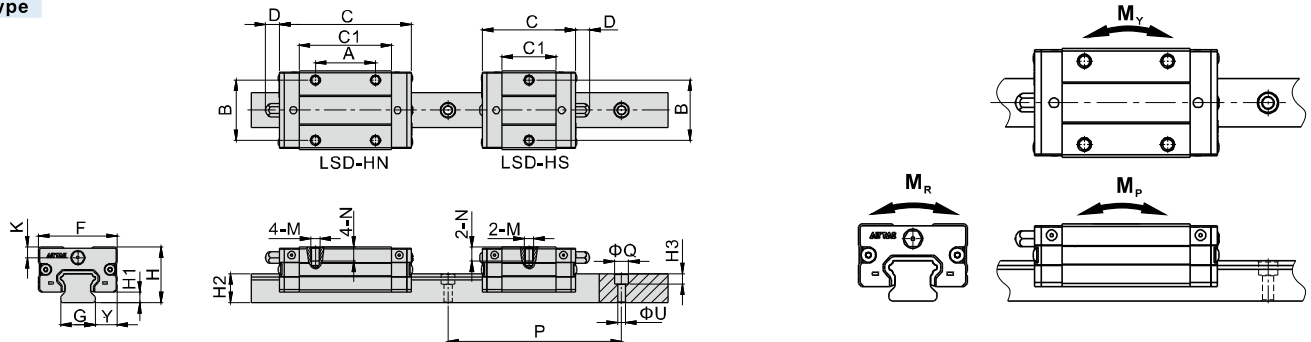

Model\Item	External Dimension (mm)							Block Dimension (mm)							Rail Dimension (mm)						
	H	H1	F	Y	C			C1	A	B	K	D	M	N	G	H2	P	ΦQ[Note]	ΦU	H3	
					Standard (Blank)	Double oil scrapers(DD)	Oil scraper+Metal scraper(ZZ)														
LSD15HS	24	4.5	34	9.5	40.5	47.5	45	23.5	-	26	4.6	6	M4X0.7	6	15	12.5	60	8(6)	4.8(3.5)	5.3(4.5)	
LSD15HN	24	4.5	34	9.5	57	64	61.5	40	26	26	4.6	6	M4X0.7	6	15	12.5	60	8(6)	4.8(3.5)	5.3(4.5)	
LSD20HS	28	6	42	11	46	53	50.5	29	-	32	6.2	13	M5X0.8	7	20	15.5	60	9.5	6	8.5	
LSD20HN	28	6	42	11	65	72	69.5	48	32	32	6.2	13	M5X0.8	7	20	15.5	60	9.5	6	8.5	
LSD25HS	33	7	48	12.5	59	66	63.5	36.5	-	35	7.2	13	M6X1.0	9	23	18	60	11.2	7	9	
LSD25HN	33	7	48	12.5	83	90	87.5	60.5	35	35	7.2	13	M6X1.0	9	23	18	60	11.2	7	9	
LSD30HS	42	9	60	16	68.5	76.5	73.5	41.5	-	40	7.2	13	M8X1.25	12	28	23	80	11.2(14.2)	7(9)	9(12)	
LSD30HN	42	9	60	16	97	105	102	70	40	40	7.2	13	M8X1.25	12	28	23	80	11.2(14.2)	7(9)	9(12)	
LSD35HS	48	11	70	18	73.5	81.5	78.5	46.5	-	50	8.5	13	M8X1.25	12	34	27.5	80	14.2	9	12	
LSD35HN	48	11	70	18	106.5	114.5	111.5	79.5	50	50	8.5	13	M8X1.25	12	34	27.5	80	14.2	9	12	


Model\Item	Mounting Screw	Dynamic Load Rating(kN)	Static Load Rating(kN)	Static Rated Moment (kN.m)			Weight	
		C	C ₀	M _R	M _P	M _V	Block(kg)	Rail(kg/m)
LSD15HS	M4(M3)	5.0	9.5	0.07	0.04	0.04	0.09	1.23
LSD15HN	M4(M3)	8.9	16.5	0.12	0.10	0.10	0.15	1.23
LSD20HS	M5	7.2	13.5	0.13	0.06	0.06	0.14	2.11
LSD20HN	M5	12.1	22.4	0.20	0.15	0.15	0.23	2.11
LSD25HS	M6	11.5	20.8	0.22	0.11	0.11	0.26	2.76
LSD25HN	M6	19.3	34.7	0.36	0.31	0.31	0.42	2.76
LSD30HS	M6(M8)	19.8	30.0	0.38	0.20	0.20	0.44	4.60
LSD30HN	M6(M8)	28.3	50.3	0.65	0.53	0.53	0.75	4.60
LSD35HS	M8	29.2	40.7	0.66	0.33	0.33	0.74	6.27
LSD35HN	M8	42.7	70.2	1.02	0.72	0.72	1.17	6.27

[Note]: The standard countersink of LSD15 rail is Φ8X5.3XΦ4.8 and with M4 screw. If with M3 screw, the ordering code should add "U", and the countersink is Φ6X4.5XΦ3.5.
The standard countersink of LSD30 rail is Φ11.2X9XΦ7 and with M6 screw. If with M8 screw, the ordering code should add "U", and the countersink is Φ14.2X12XΦ9.

Low Profile Type Linear Guide

LSD Series

Flange type, Top-Mount

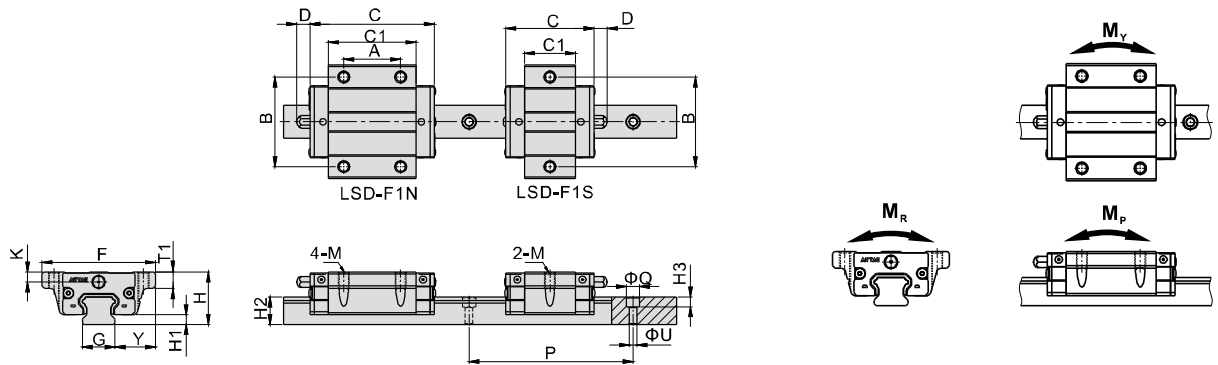

Model\Item	External Dimension (mm)							Block Dimension (mm)							Rail Dimension (mm)						
	H	H1	F	Y	C			C1	A	B	K	D	M	T1	G	H2	P	ΦQ[Note]	ΦU	H3	
					Standard (Blank)	Double oil scrapers(DD)	Oil scraper+Metal scraper(ZZ)														
LSD15F1S	24	4.5	52	18.5	40.5	47.5	45	23.5	-	41	4.6	6	M5X0.8	7.5	15	12.5	60	8(6)	4.8(3.5)	5.3(4.5)	
LSD15F1N	24	4.5	52	18.5	57	64	61.5	40	26	41	4.6	6	M5X0.8	7.5	15	12.5	60	8(6)	4.8(3.5)	5.3(4.5)	
LSD20F1S	28	6	59	19.5	46	53	50.5	29	-	49	6.2	13	M6X1.0	9.5	20	15.5	60	9.5	6	8.5	
LSD20F1N	28	6	59	19.5	65	72	69.5	48	32	49	6.2	13	M6X1.0	9.5	20	15.5	60	9.5	6	8.5	
LSD25F1S	33	7	73	25	59	66	63.5	36.5	-	60	7.2	13	M8X1.25	10.5	23	18	60	11.2	7	9	
LSD25F1N	33	7	73	25	83	90	87.5	60.5	35	60	7.2	13	M8X1.25	10.5	23	18	60	11.2	7	9	
LSD30F1S	42	9	90	31	68.5	76.5	73.5	41.5	-	72	7.2	13	M10X1.5	10.5	28	23	80	11.2(14.2)	7(9)	9(12)	
LSD30F1N	42	9	90	31	97	105	102	70	40	72	7.2	13	M10X1.5	10.5	28	23	80	11.2(14.2)	7(9)	9(12)	
LSD35F1S	48	11	100	33	73.5	81.5	78.5	46.5	-	82	8.5	13	M10X1.5	13.5	34	27.5	80	14.2	9	12	
LSD35F1N	48	11	100	33	106.5	114.5	111.5	79.5	50	82	8.5	13	M10X1.5	13.5	34	27.5	80	14.2	9	12	

Model\Item	Mounting Screw	Dynamic Load Rating(kN)	Static Load Rating(kN)	Static Rated Moment (kN.m)			Weight	
				MR	MP	MY	Block(kg)	Rail(kg/m)
LSD15F1S	M4(M3)	5.0	9.5	0.07	0.04	0.04	0.12	1.23
LSD15F1N	M4(M3)	8.9	16.5	0.12	0.10	0.10	0.21	1.23
LSD20F1S	M5	7.2	13.5	0.13	0.06	0.06	0.18	2.11
LSD20F1N	M5	12.1	22.4	0.20	0.15	0.15	0.31	2.11
LSD25F1S	M6	11.5	20.8	0.22	0.11	0.11	0.36	2.76
LSD25F1N	M6	19.3	34.7	0.36	0.31	0.31	0.60	2.76
LSD30F1S	M6(M8)	19.8	30.0	0.38	0.20	0.20	0.61	4.60
LSD30F1N	M6(M8)	28.3	50.3	0.65	0.53	0.53	1.03	4.60
LSD35F1S	M8	29.2	40.7	0.66	0.33	0.33	0.93	6.27
LSD35F1N	M8	42.7	70.2	1.02	0.72	0.72	1.50	6.27


[Note]: The standard countersink of LSD15 rail is $\Phi 8 \times 5.3 \times \Phi 4.8$ and with M4 screw. If with M3 screw, the ordering code should add "U", and the countersink is $\Phi 6 \times 4.5 \times \Phi 3.5$.
The standard countersink of LSD30 rail is $\Phi 11.2 \times 9 \times \Phi 7$ and with M6 screw. If with M8 screw, the ordering code should add "U", and the countersink is $\Phi 14.2 \times 12 \times \Phi 9$.

Low Profile Type Linear Guide

LSD Series

Flange type, Bottom-Mount

Flange type, Top or Bottom-Mount

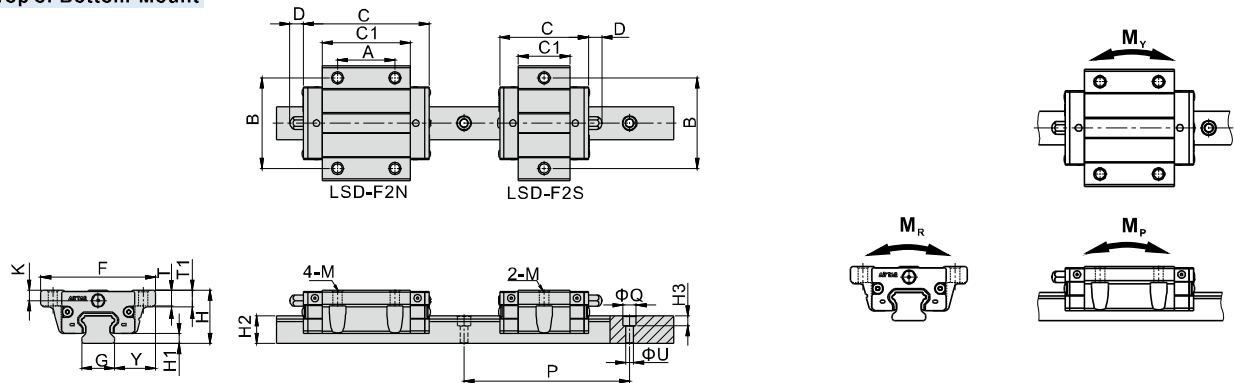

Model\Item	External Dimension (mm)							Block Dimension (mm)							Rail Dimension (mm)							
	H	H1	F	Y	C			C1	A	B	K	D	M		T	T1	G	H2	P	ΦQ [Note]	ΦU [Note]	H3 [Note]
					Standard (Blank)	Double oil scrapers (DD)	Oil scraper +Metal craper (ZZ)						Bottom- Mount	Top or Bottom- Mount								
LSD15F2(F3)S	24	4.5	52	18.5	40.5	47.5	45	23.5	-	41	4.6	6	Φ4.5	M5X0.8	7	7.5	15	12.5	60	8(6)	4.8(3.5)	5.3(4.5)
LSD15F2(F3)N	24	4.5	52	18.5	57	64	61.5	40	26	41	4.6	6	Φ4.5	M5X0.8	7	7.5	15	12.5	60	8(6)	4.8(3.5)	5.3(4.5)
LSD20F2(F3)S	28	6	59	19.5	46	53	50.5	29	-	49	6.2	13	Φ5.7	M6X1.0	9	9.5	20	15.5	60	9.5	6	8.5
LSD20F2(F3)N	28	6	59	19.5	65	72	69.5	48	32	49	6.2	13	Φ5.7	M6X1.0	9	9.5	20	15.5	60	9.5	6	8.5
LSD25F2(F3)S	33	7	73	25	59	66	63.5	36.5	-	60	7.2	13	Φ6.8	M8X1.25	10	10.5	23	18	60	11.2	7	9
LSD25F2(F3)N	33	7	73	25	83	90	87.5	60.5	35	60	7.2	13	Φ6.8	M8X1.25	10	10.5	23	18	60	11.2	7	9
LSD30F2(F3)S	42	9	90	31	68.5	76.5	79.5	41.5	-	72	7.2	13	Φ9	M10X1.5	10	10.5	28	23	80	11.2(14.2)	7(9)	9(12)
LSD30F2(F3)N	42	9	90	31	97	105	102	70	40	72	7.2	13	Φ9	M10X1.5	10	10.5	28	23	80	11.2(14.2)	7(9)	9(12)
LSD35F2(F3)S	48	11	100	33	73.5	81.5	78.5	46.5	-	82	8.5	13	Φ9	M10X1.5	13	13.5	34	27.5	80	14.2	9	12
LSD35F2(F3)N	48	11	100	33	106.5	114.5	111.5	79.5	50	82	8.5	13	Φ9	M10X1.5	13	13.5	34	27.5	80	14.2	9	12


Model\Item	Mounting Screw	Dynamic Load Rating(kN)	Static Load Rating(kN)	Static Rated Moment (kN.m)			Weight	
		C	C ₀	M _R	M _p	M _y	Block(kg)	Rail(kg/m)
LSD15F2(F3)S	M4(M3)	5.0	9.5	0.07	0.04	0.04	0.12	1.23
LSD15F2(F3)N	M4(M3)	8.9	16.5	0.12	0.10	0.10	0.21	1.23
LSD20F2(F3)S	M5	7.2	13.5	0.13	0.06	0.06	0.18	2.11
LSD20F2(F3)N	M5	12.1	22.4	0.20	0.15	0.15	0.31	2.11
LSD25F2(F3)S	M6	11.5	20.8	0.22	0.11	0.11	0.36	2.76
LSD25F2(F3)N	M6	19.3	34.7	0.36	0.31	0.31	0.60	2.76
LSD30F2(F3)S	M6(M8)	19.8	30.0	0.38	0.20	0.20	0.61	4.60
LSD30F2(F3)N	M6(M8)	28.3	50.3	0.65	0.53	0.53	1.03	4.60
LSD35F2(F3)S	M8	29.2	40.7	0.66	0.33	0.33	0.93	6.27
LSD35F2(F3)N	M8	42.7	70.2	1.02	0.72	0.72	1.50	6.27

[Note]: The standard countersink of LSD15 rail is Φ8X5.3XΦ4.8 and with M4 screw. If with M3 screw, the ordering code should add "U", and the countersink is Φ6X4.5XΦ3.5.
The standard countersink of LSD30 rail is Φ11.2X9XΦ7 and with M6 screw. If with M8 screw, the ordering code should add "U", and the countersink is Φ14.2X12XΦ9.

Low Profile Type Linear Guide

LSD Series

Dimension of bottom-mount type rail

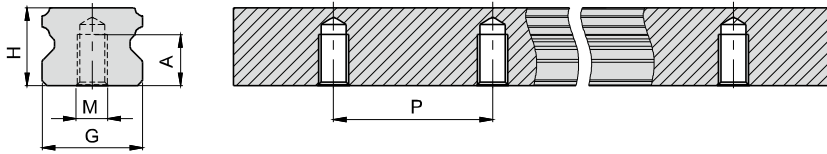


Model/Item	G	H	M	A	P
LSD15T	15	12.5	M5X0.8	7	60
LSD20T	20	15.5	M6X1.0	9	60
LSD25T	23	18	M6X1.0	10	60
LSD30T	28	23	M8X1.25	14	80
LSD35T	34	27.5	M8X1.25	17	80

Accuracy Classes

LSD Low Profile type linear guide comes with 3 accuracy levels.

Table 1 : Parallelism of the raceway


 The identification line of the Datum	Accuracy Standards (mm)							
	Accuracy		N : Normal		H: High		P: Precision	
	Model		15/20	25/30/35	15/20	25/30/35	15/20	25/30/35
	Tolerance of height H		±0.1		±0.03	±0.04	±0.015	±0.02
	Variation of height ΔH		0.02	0.025	0.01	0.015	0.006	0.007
	Tolerance of width Y		±0.1		±0.03	±0.04	±0.015	±0.02
	Variation of width ΔY		0.02	0.03	0.01	0.015	0.006	0.007
	Parallelism of C-surface relative to A-surface		Parallelism of raceway (Refer to Table 1)					
	Parallelism of D-surface relative to B-surface		Parallelism of raceway (Refer to Table 1)					
Accuracy Rail Length(mm)		Parallelism of the raceway(μm)						
		N	H	P				
100 under		12	5	3				
100~200		14	6	3				
200~300		15	7	4				
300~500		17	9	5				
500~700		20	11	7				
700~900		22	12	7				
900~1100		24	14	8				
1100~1500		26	15	9				
1500~1900		28	17	10				
1900~2500		31	18	12				
2500~3100		33	21	14				
3100~3600		36	23	16				
3600~4000		37	23	16				

Preload Level

1. Preload interference

The LSD Low Profile type Linear Guide has preload categories: A, B and C.

Choosing suitable preload level will enhance rigidity, precision and torsion resistant performance of the linear guide.



Model	Radial interference(μm)		
	Standard clearance(A)	Light Preload(B)	Middle Preload(C)
LSD15	-4~+2	-12~-4	-22~-14
LSD20	-5~+2	-13~-5	-23~-15
LSD25	-6~+2	-14~-6	-24~-16
LSD30	-7~+2	-16~-7	-29~-20
LSD35	-8~+2	-21~-11	-34~-24

2. Common Application

Refer to following table for suitable application of different preload grade:

Preload grade	Requirement	Common Application
Standard clearance(A)	One axial movement, small vibration and impact, accuracy requirement is low	Conveyor Machine, Semiconductor Equipment, Stage Equipment, Press Machine, Welding Machine and other light movement equipments
Light Preload(B)	Equipment that requires light-load and high-precision.	Z-axis movement for industrial use, NC lathe, EDM, Precision XY platform, Vertical machine center, measurement instrument, material feeder or industrial robot
Medium Preload(C)	Equipment that requires high rigidity, large vibration and shock.	Machining centers, NC lathes, grinders, vertical or horizontal milling machines, boring machines, tool guides, heavy cutting machines.


Low Profile Type Linear Guide

LSD Series

Installation Illustration

1. Allowable tolerance of mounting surface

LSD series is an arc-shape, two-point contact design of linear guide. Its self-centering feature allows some tolerance on mounting surface without affecting the smoothness of linear motion. The allowable tolerance is indicated in following table:

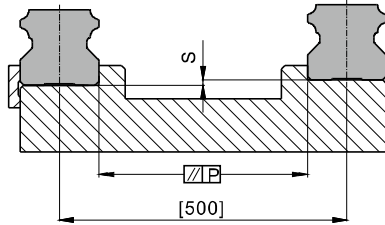


Model	Allowable tolerance of parallelism P(μm)			Allowable tolerance of top and bottom S (μm)		
	Standard clearance(A)	Light Preload(B)	Medium Preload(C)	Standard clearance(A)	Light Preload(B)	Medium Preload(C)
LSD15	25	18	-	130	85	-
LSD20	25	20	18	130	85	50
LSD25	30	22	20	130	85	70
LSD30	40	30	27	170	110	90
LSD35	50	35	30	210	150	120

Note: The value in the table is the allowable value when the distance between the two linear guides is 500mm, and the allowable value is proportional to the distance between the two linear guides.

2. Height and Chamfer of Reference Edge

In order to ensure accurate installation of LSD Linear Guide, the contact space should not exceed the given figures in following table.

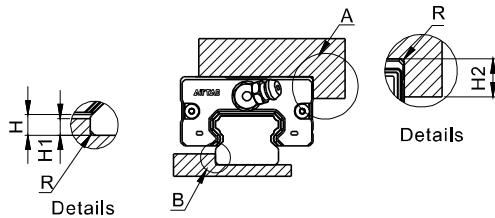

Unit : mm

Model	H	H1	H2	R(Max)
LSD15	4.5	2.7	5	0.5
LSD20	6	5	7	0.5
LSD25	7	5	7.5	1
LSD30	9	7	7	1
LSD35	11	7.5	9.5	1

3. Screw Tighten Torque

When installing linear guide, whether the screws are well tighten and surface is well contacted will affect accuracy significantly. Please refer to following table for tightening force to ensure a perfect installation.

Model	Screw size	Tighten Torque(N.cm)		
		Iron	Casting	Aluminum alloy
LSD15	M3	196	127	98
	M4	412	274	206
LSD20	M5	882	588	441
LSD25	M6	1370	921	686
LSD30	M6	1370	921	686
	M8	3040	2010	1470
LSD35	M8	3040	2010	1470

Low Profile Type Linear Guide

LSD Series

Lubrication method

When a linear guide is well lubricated, it can reduce wear and increase lifespan significantly. Lubrication has the following benefits :

- Reduces friction of the rollers and raceway to minimize wear.
- The grease film between contact surface can prevent roller fatigue.
- Prevent rust.

1. Lubrication Grease

Use the correct grade of lubrication. While lubricating, a grease gun can be used to pump grease into slider through the grease nipple on it. The suitable condition for lube is when working speed is under 60 m/min and not in cooling process.

•Nipple type

	L-P-M4	L-P-M6	L-P-SM6
Grease nipple type			

•Grease amount

LSD series linear guide is well lubricated with 'Mobilith EP2' in factory. Customers are recommended to use identical or the same grade of lubricant. After lubrication, block needs to be moved back and forth at least three times for the length of three blocks and repeat at least twice. Check if the surface of rail is well covered by grease film.

Model	Grease amount for the first lubrication(cm ³)		Replenishment amount(cm ³)	
	Short type	Standard type	Short type	Standard type
LSD15	0.5	0.9	0.2	0.3
LSD20	1.1	1.8	0.4	0.6
LSD25	1.8	3.2	0.6	1.0
LSD30	2.9	4.5	0.9	1.4
LSD35	4.1	5.9	1.3	1.8

•Lubrication frequency

Although the linear guides are well lubricated at factory and retains grease well, frequent lubrication is still necessary to avoid undesirable wear. Recommended lubrication period is every 100km of movement or every 3~6 months. (Refer to table on the top for suggested amount)

2. Lubricating oil

Recommended oil viscosity for lubrication use is about 30 to 150 cst.

Lubrication oil is suitable for all kinds of load and impact application, but not for high temperature use due to its tendency of vaporization.

•Adaptor

L-P-AM6	L-P-AM8	L-P-A01
LSD15	LSD35 LSD30 LSD25 LSD20	LSD35 LSD30 LSD25 LSD20
L-P-LM6	L-P-LM8	L-P-L01
LSD15	LSD35 LSD30 LSD25 LSD20	LSD35 LSD30 LSD25 LSD20

Note: After installation, the top surface of adaptor may be higher than block. Be careful about the interference while moving.

Low Profile Type Linear Guide

LSD Series

Lubrication method


•Oil supply rate

Loss of lubrication oil is faster than lubrication grease. Pay attention to sufficiency of oil while using.

Model	Oil amount for the first lubrication(cm ³)	Feeding Speed(cm ³ /hr)
LSD15	0.3	0.1
LSD20	0.5	0.15
LSD25	0.6	0.2
LSD30	0.8	0.25
LSD35	0.9	0.3

3. Grease nipple/adaptor installation

- Grease nipple or adaptor can be installed in the two sides of block for manual or automatic lubrication based on customer's requirement.
- There are a secondary set of lubricating ports on the side of the block. When using, it is not recommended to use the side with datum line unless necessary.
- Lateral nipple installation is not recommended for flange type blocks.
(The grease / oil nipple may interfere with block)
- If lateral lubrication is needed for above spec, please contact us for customization.

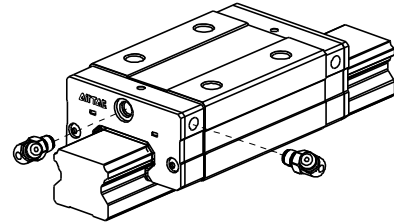


Bolt hole plug

1. Plug type


In order to prevent metal swarf or external objects from entering blocks and affecting precision and lifespan, customers must put plugs into holes during installation. Every rail is equipped with default plugs.

Model	Bolt	Diameter(D)(mm)	Thickness(H)(mm)
LSD15	M3	6.15	1.2
	M4	8.15	1.1
LSD20	M5	9.65	2.5
LSD25	M6	11.4	2.5
LSD30	M6	11.4	2.5
	M8	14.4	3.5
LSD35	M8	14.4	3.5




2. Plug installation Steps

Step one

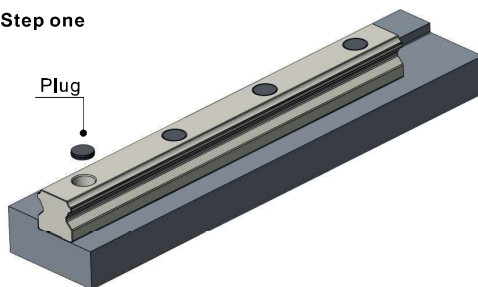

Place the plug in counterbore.

Step two

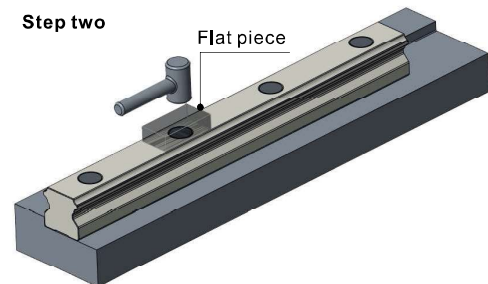

Place the flat piece on mounting hole, hit the piece vertically with a plastic hammer and fix the plug into counterbore.

Note :

- Please make sure the plugs do not protrude the rail surface.
- After installation, please clean the surface before use.

Dustproof standard type linear guide

LSD Series



Order Information(Combined)

1、LSD15/30

LSD □ 15 H N 1 X220 S20 A H-U-AM6-B-T-DD

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮

① Model Code	LSD:Dustproof standard type linear guide			
② Rail&Block surface treatment	Blank: without additional coating. (natural color) ★BB: Block and rail coated with black chrome			
③ Rail Width	15:15mm 30:28mm			
④ Block Style	H: Square type F1: Flange type, Mounting from top F2: Flange type, Mounting from bottom F3: Flange type, Mounting from top or bottom			
⑤ Block type	S: Short N: Standard			
⑥ Number of Block	1: One 2: Two [Note: Amount of block on a single set of linear guide]			
⑦ Length of Rail	220:220mm[Defined by customer]			
⑧ Position of first mounting hole	S□ : Distance from end of rail to the center of first mounting hole (It is recommended to be greater than minimum margin)			
⑨ Preload	A: Standard clearance B: Light Preload C: Medium Preload			
⑩ Accuracy	N : Normal H : High P : Precision			
⑪ Rail type	LSD15:Blank: Top-mount(M4) LSD30:Blank: Top-mount(M6)		LSD15:U: Top-mount(M3) LSD30:U: Top-mount(M8)	
	LSD15 	LSD30 	LSD15 	LSD30
⑫ Nipple /adapter type	LSD15: M4: M4 Nipple LSD30: M6: M6 Nipple		LSD15: AM6: M4 to M6 LSD30: A01: M6 to PT1/8 LSD30: AM8: M6 to M8	
	M4 	M6 	I type 	L type
⑬ Packing type	Blank: the block and rail are assembled B: block and rail are put separately			
⑭ Rail type	Blank: Top-mount T: Bottom-mount			
⑮ Dust proof	DD: Double oil scrapers ZZ: Oil scraper + metal scraper			

[Note1] For LSD-BB series, standard length of a rail is 3 m.

Please contact with our company if length of rail exceeds the maximum.

Add: Rail type indicated in ⑪ and ⑫ in ordering code cannot be selected at the same time, only one of them can be selected.

Dustproof standard type linear guide

LSD Series

2、LSD20/25/35

LSD □ 20 H N 1 X220 S20 A H - AM8-B - T-DD

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭

① Model Code	LSD:Dustproof standard type linear guide			
② Rail&Block surface treatment	Blank: without additional coating. (natural color) ★BB: Block and rail coated with black chrome			
③ Rail Width	20:20mm	25:23mm	35:34mm	
④ Block Style	H: Square type F1: Flange type, Mounting from top F2: Flange type, Mounting from bottom F3: Flange type, Mounting from top or bottom			
⑤ Block type	S: Short N: Standard			
⑥ Number of Block	1: One	2: Two [Note: Amount of block on a single set of linear guide]		
⑦ Length of Rail	220:220mm[Defined by customer]			
⑧ Position of first mounting hole	S□ : Distance from end of rail to the center of first mounting hole (It is recommended to be greater than minimum margin)			
⑨ Preload	A: Standard clearance		B: Light Preload	C: Medium Preload
⑩ Accuracy	N : Normal		H : High	P : Precision
⑪ Nipple /adapter type	M6:M6 Nipple	A01:M6 to PT1/8 AM8:M6 to M8	L01:M6 to PT1/8 LM8:M6 to M8	SM6: M6 Nipple
		I type 	L type 	SM6 
⑫ Packing type	Blank: the block and rail are assembled B: block and rail are put separately			
⑬ Rail type	Blank: Top-mount T: Bottom-mount			
⑭ Dust proof	DD: Double oil scrapers ZZ: Oil scraper + metal scraper			

[Note1] For LSD-BB series, standard length of a rail is 3 m.
Please contact with our company if length of rail exceeds the maximum.

Dustproof standard type linear guide

LSD Series





Butt-jointed Order Information

1、LSD15/30

LSD □ 15 H N 1X2970 T 2940T2970 A H-U-AM6-B -T -DD

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Butt-jointed end margin:1/2P ,
Position of the first and last
hole is defined by customer.

① Model Code	LSD:Dustproof standard type linear guide			
② Rail&Block surface treatment	Blank: without additional coating. (natural color) ★BB: Block and rail coated with black chrome			
③ Rail Width	15:15mm 30:28mm			
④ Block Style	H: Square type F1: Flange type, Mounting from top F2: Flange type, Mounting from bottom F3: Flange type, Mounting from top or bottom			
⑤ Block type	S: Short N: Standard			
⑥ Number of Block	1: One 2: Two [Note: Amount of block on a single set of linear guide]			
⑦ Length of first Rail	2970:2970mm[Defined by customer]			
⑧ Butt-jointed mark	T: Rail Butt-jointed mark(Butt-jointed end margin:1/2P) [P is the standard hole distance]			
⑨ Length of second Rail	2940:2940mm[Defined by customer]			
⑩ Butt-jointed mark	Blank: two rails joint T: Rail Butt-jointed mark (Butt-jointed end margin:1/2P) [P is the standard hole distance]			
⑪ Length of third Rail	Blank: two rails joint 2970:2970mm..[Defined by the customer]			
⑫ Preload	A: Standard clearance B: Light Preload C: Medium Preload			
⑬ Accuracy	N : Normal H : High			
⑭ Rail type	LSD15:Blank: Top-mount(M4)		LSD15:U: Top-mount(M3)	
	LSD30:Blank: Top-mount(M6)		LSD30:U: Top-mount(M8)	
	LSD15	LSD30	LSD15	LSD30
				
⑮ Nipple /adapter type	LSD15: M4: M4 Nipple		LSD15: LM6: M4 to M6	
	LSD30: M6: M6 Nipple		LSD30: L01: M6 to PT1/8	
	LSD30: AM8: M6 to M8		LSD30: LM8: M6 to M8	
	 	 		 
⑯ Packing type	Blank: the block and rail are assembled B: block and rail are put separately			
⑰ Rail type	Blank: Top-mount T: Bottom-mount			
⑱ Dust proof	DD: Double oil scrapers ZZ: Oil scraper + metal scraper			

- [Note1] For LSD-BB series, standard length of a rail is 3 m.
Maximum length of two-joint rail is 6 m.
Maximum length of three-joint rail is 9 m.
Please contact with our company if length of rail exceeds the maximum.
- Add 1: Number of joints cannot be more than 2 times(three rails at most).
For LSD15, maximum length of jointed rail is 12080mm.
For LSD30, it's 12030.
Customization is needed for joint times more than standard.
- Add2 :Rail type indicated in ⑭ and ⑮ in ordering code cannot be selected at the same time, only one of them can be selected.

Dustproof standard type linear guide

LSD Series

2、LSD20/25/35

LSD □ 20 H N 1X2970T2940T2970A H-AM8-B-T-DD

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

Butt-jointed end margin: 1/2P ,
Position of the first and last
hole is defined by customer.

① Model Code	LSD:Dustproof standard type linear guide			
② Rail&Block surface treatment	Blank: without additional coating. (natural color) ★BB: Block and rail coated with black chrome			
③ Rail Width	20:20mm	25:23mm	35:34mm	
④ Block Style	H: Square type F1: Flange type, Mounting from top F2: Flange type, Mounting from bottom F3: Flange type, Mounting from top or bottom			
⑤ Block type	S: Short N: Standard			
⑥ Number of Block	1: One 2: Two [Note: Amount of block on a single set of linear guide]			
⑦ Length of first Rail	2970:2970mm[Defined by customer]			
⑧ Butt-jointed mark	T: Rail Butt-jointed mark (Butt-jointed end margin: 1/2P) [P is the standard hole distance]			
⑨ Length of second Rail	2940:2940mm[Defined by customer]			
⑩ Butt-jointed mark	Blank: two rails joint T: Rail Butt-jointed mark (Butt-jointed end margin: 1/2P) [P is the standard hole distance]			
⑪ Length of third Rail	Blank: two rails joint 2970:2970mm..[Defined by the customer]			
⑫ Preload	A: Standard clearance B: Light Preload C: Medium Preload			
⑬ Accuracy	N : Normal H : High			
⑭ Nipple /adapter type	M6: M6 Nipple	A01: M6 to PT1/8 AM8: M6 to M8	L01: M6 to PT1/8 LM8: M6 to M8	SM6: M6 Nipple
		I type 	L type 	SM6 
⑮ Packing type	Blank: the block and rail are assembled B: block and rail are put separately			
⑯ Rail type	Blank: Top-mount T: Bottom-mount			
⑰ Dust proof	DD: Double oil scrapers ZZ: Oil scraper + metal scraper			

[Note1] For LSD-BB series, standard length of a rail is 3 m.
Maximum length of two-joint rail is 6 m.
Maximum length of three-joint rail is 9 m.
Please contact with our company if length of rail exceeds the maximum.
Add: Number of joints cannot be more than 2 times(three rails at most).
For LSD20/25, maximum length of jointed rail is 12080mm.
For LSD35, it's 12030.
Customization is needed for joint times more than standard.


Dustproof standard type linear guide

LSD Series


1. Block Order Information

LSD □ 15 BK - H N - H - D - AM6-DD

1 2 3 4 5 6 7 8 9 10



S: Short



N: Standard

① Model Code	LSD:Dustproof standard type linear guide							
② Coating on block	Blank: Block without additional coating. (natural color) ★B: Block coated with black chrome							
③ Rail Width	15:15mm	20:20mm	25:23mm	30:28mm	35:34mm			
④ Block Code	BK: Block							
⑤ Block Style	H: Square type F1: Flange type, Mounting from top F2: Flange type, Mounting from bottom F3: Flange type, Mounting from top or bottom							
⑥ Block type	S: Short N: Standard							
⑦ Accuracy	N : Normal H : High							
⑧ Group code	SD SC SB B D [Note]							
⑨ Nipple /adapter type	15	M4	M4 Nipple			M6	M6 Nipple	
		AM6	M4 to M6	I type 	20	A01	M6 to PT1/8	I type 
					25	AM8	M6 to M8	
				L type	30	L01	M6 to PT1/8	L type 
					35	LM8	M6 to M8	
			LM6	M4 to M6		SM6	M6 Nipple	
⑩ Dust proof	DD: Double oil scrapers ZZ: Oil scraper + metal scraper							

[Note] When selecting rails and bearings, the different pairing codes can change the units preload, details see "preload pairing chart".




Dustproof standard type linear guide

LSD Series

Dust prevention illustration

1. Code and structure

AirTAC provides the following dust prevention accessories for the linear guides working in dusty environment, if the following accessories are demanded, please add the corresponding code when ordering.

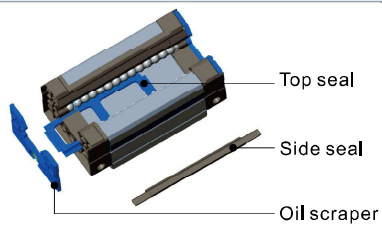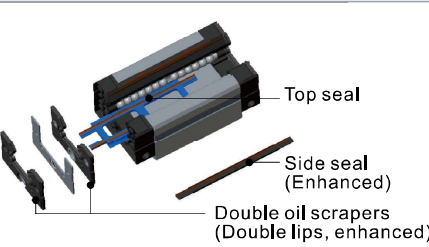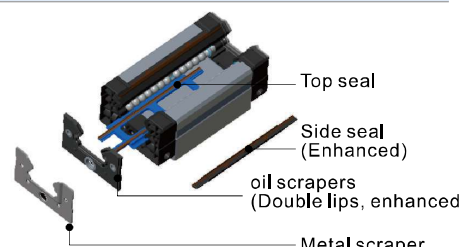Code	Blank: Standard	DD: Double oil scrapers	ZZ: Metal scraper + Oil scraper
Structure	 Top seal Side seal Oil scraper	 Top seal Side seal (Enhanced) Double oil scrapers (Double lips, enhanced)	 Top seal Side seal (Enhanced) oil scrapers (Double lips, enhanced) Metal scraper

2. Test for high dust prevention

2.1. Test item

Test medium	Wood chip	Iron filing	Gravel
Running distance	500km	500km	500km

2.2. Test equipment

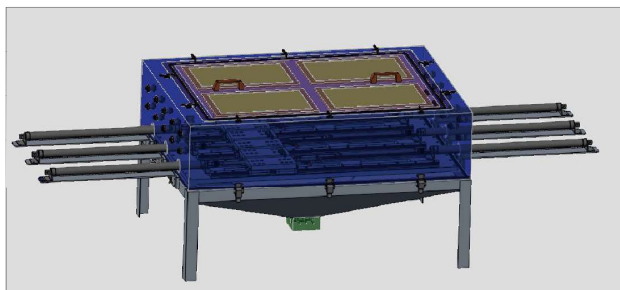


Figure1: Dust tester (Appearance)



Figure2: Dust tester (Inside)

2.3. Test condition

AirTAC adopts the industry's first dust tester (Figure 1) to simulate real working conditions, 360° without dead angles, all-round dust invasion (Figure 2). The dustproof test simulates multiple application scenarios, fully fill the air with wood chips, iron filings and gravels and are strictly tested to ensure the quality and dustproof effect of each block.

2.4. Test result

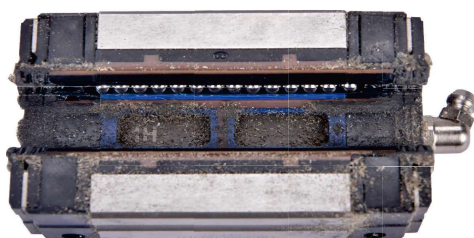


Figure3: Steel balls



Figure4: Steel balls


Result: It can be seen from the Figure 3 and 4 that little amount of dust enters the inside of the block after testing, and the steel ball surface is still smooth, the block still runs smoothly and the performance is not affected.

Note: The above test results are obtained from AirTAC lab.

3. Dimensions

Highly dustproof type blocks have different length compared with the standard blocks (only dimension C is different from the standard, the others keep same), see the table on the right for details.

Please refer to P43-45 for the detailed dimension.

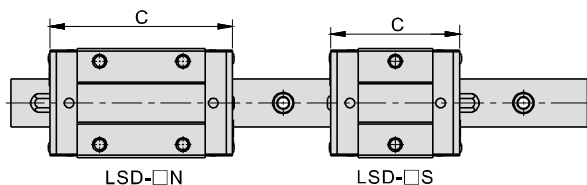

Model	Type	Length C(mm)		
		Standard (Blank)	Double oil scrapers(DD)	Oil scraper+Metal scraper(ZZ)
LSD15□S	Short	40.5	47.5	45
LSD15□N	Standard	57	64	61.5
LSD20□S	Short	46	53	50.5
LSD20□N	Standard	65	72	69.5
LSD25□S	Short	59	66	63.5
LSD25□N	Standard	83	90	87.5
LSD30□S	Short	68.5	76.5	73.5
LSD30□N	Standard	97	105	102
LSD35□S	Short	73.5	81.5	78.5
LSD35□N	Standard	106.5	114.5	111.5

AirTAC

The image displays two perspectives of a linear motion assembly. The left view is a side profile showing a long, silver-colored aluminum rail with a central black and blue carriage. The right view is a top-down perspective of the same assembly, showing the rail's T-slot profile and the carriage's top surface, which features a blue section and mounting holes.

1、LSD15/30

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

[Note] For LSD-BB series, standard length of a rail is 3 m.
Please contact with our company if length of rail exceeds the maximum.
Add: Rail type indicated in ① and ② in ordering code cannot be selected at the same time,
only one of them can be selected.

Self-lubricator Standard Linear Guide

LSD Series

2、LSD20/25/35

LSD □ 20 H N 1 X220 S20 A H - AM8-B - T-E

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭

① Model Code	LSD: Self-lubricator Standard Linear Guide			
② Rail & Block surface treatment	Blank: without additional coating. (natural color) ★BB: Block and rail coated with black chrome			
③ Rail Width	20:20mm 25:23mm 35:34mm			
④ Block Style	H: Square type F1: Flange type, Mounting from top F2: Flange type, Mounting from bottom F3: Flange type, Mounting from top or bottom			
⑤ Block type	S: Short N: Standard			
⑥ Number of Block	1: One 2: Two [Note: Amount of block on a single set of linear guide]			
⑦ Length of Rail	220:220mm[Defined by customer]			
⑧ Position of first mounting hole	S□ : Distance from end of rail to the center of first mounting hole (It is recommended to be greater than minimum margin)			
⑨ Preload	A: Standard clearance B: Light Preload C: Medium Preload			
⑩ Accuracy	N : Normal H : High P : Precision			
⑪ Nipple / adapter type	M6: M6 Nipple	A01: M6 to PT1/8 AM8: M6 to M8	L01: M6 to PT1/8 LM8: M6 to M8	SM6: M6 Nipple
		I type 	L type 	SM6 
⑫ Packing type	Blank: the block and rail are assembled B: block and rail are put separately			
⑬ Rail type	Blank: Top-mount T: Bottom-mount			
⑭ Self-lubricator Standard Type	E: Self-lubricator Standard Type			

[Note] For LSD-BB series, standard length of a rail is 3 m.
Please contact with our company if length of rail exceeds the maximum.

Self-lubricator Standard Linear Guide

LSD Series





Butt-jointed Order Information

1、LSD15/30

LSD □ 15 H N 1X2970 T 2940T2970 A H-U-AM6-B-T-E

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Butt-jointed end margin: 1/2P ,
Position of the first and last
hole is defined by customer.

① Model Code	LSD:Self-lubricator Standard Linear Guide			
② Rail&Block surface treatment	Blank: without additional coating. (natural color) ★BB: Block and rail coated with black chrome			
③ Rail Width	15:15mm 30:28mm			
④ Block Style	H: Square type F1: Flange type, Mounting from top F2: Flange type, Mounting from bottom F3: Flange type, Mounting from top or bottom			
⑤ Block type	S: Short N: Standard			
⑥ Number of Block	2: Two [Note: Amount of block on a single set of linear guide] 1: One			
⑦ Length of first Rail	2970:2970mm[Defined by customer]			
⑧ Butt-jointed mark	T: Rail Butt-jointed mark(Butt-jointed end margin: 1/2P) [P is the standard hole distance]			
⑨ Length of second Rail	2940:2940mm[Defined by customer]			
⑩ Butt-jointed mark	Blank: two rails joint T: Rail Butt-jointed mark (Butt-jointed end margin: 1/2P) [P is the standard hole distance]			
⑪ Length of third Rail	Blank: two rails joint 2970:2970mm..[Defined by the customer]			
⑫ Preload	A: Standard clearance B: Light Preload C: Medium Preload			
⑬ Accuracy	N : Normal H : High			
⑭ Rail type	LSD15:Blank: Top-mount(M4)		LSD15:U: Top-mount(M3)	
	LSD30:Blank: Top-mount(M6)		LSD30:U: Top-mount(M8)	
	LSD15	LSD30	LSD15	LSD30
				
⑮ Nipple /adapter type	LSD15: M4: M4 Nipple		LSD15: M6: M4 to M6	
	LSD30: M6: M6 Nipple		LSD30: A01: M6 to PT1/8 L01: M6 to PT1/8	
	LSD30: AM8: M6 to M8		LSD30: LM8: M6 to M8	
	M4 M6	I type	L type	SM6
⑯ Packing type	Blank: the block and rail are assembled B: block and rail are put separately			
⑰ Rail type	Blank: Top-mount T: Bottom-mount			
⑱ Self-lubricator Standard Type	E:Self-lubricator Standard Type			

[Note]For LSD-BB series, standard length of a rail is 3 m.

Maximum length of two-joint rail is 6 m. Maximum length of three-joint rail is 9 m.
Please contact with our company if length of rail exceeds the maximum.

Add : Number of joints cannot be more than 2 times(three rails at most).

For LSD15, maximum length of jointed rail is 12080mm.

For LSD30, it's 12030.

Customization is needed for joint times more than standard.

Add2 :Rail type indicated in ⑭ and ⑮ in ordering code cannot be selected at the same time, only one of them can be selected.

Self-lubricator Standard Linear Guide

LSD Series

2、LSD20/25/35

LSD □ 20 H N 1X2970T2940T2970A H-AM8-B-T-E

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

Butt-jointed end margin: 1/2P ,
Position of the first and last
hole is defined by customer.

① Model Code	LSD: Self-lubricator Standard Linear Guide			
② Rail&Block surface treatment	Blank: without additional coating. (natural color) ★BB: Block and rail coated with black chrome			
③ Rail Width	20:20mm	25:23mm	35:34mm	
④ Block Style	H: Square type F1: Flange type, Mounting from top F2: Flange type, Mounting from bottom F3: Flange type, Mounting from top or bottom			
⑤ Block type	S: Short N: Standard			
⑥ Number of Block	1: One 2: Two [Note: Amount of block on a single set of linear guide]			
⑦ Length of first Rail	2970:2970mm[Defined by customer]			
⑧ Butt-jointed mark	T: Rail Butt-jointed mark (Butt-jointed end margin: 1/2P) [P is the standard hole distance]			
⑨ Length of second Rail	2940:2940mm[Defined by customer]			
⑩ Butt-jointed mark	Blank: two rails joint T: Rail Butt-jointed mark (Butt-jointed end margin: 1/2P) [P is the standard hole distance]			
⑪ Length of third Rail	Blank: two rails joint 2970:2970mm..[Defined by the customer]			
⑫ Preload	A: Standard clearance B: Light Preload C: Medium Preload			
⑬ Accuracy	N : Normal H : High			
⑭ Nipple /adapter type	M6: M6 Nipple	A01: M6 to PT1/8 AM8: M6 to M8	L01: M6 to PT1/8 LM8: M6 to M8	SM6: M6 Nipple
		I type 	L type 	SM6 
⑮ Packing type	Blank: the block and rail are assembled B: block and rail are put separately			
⑯ Rail type	Blank: Top-mount T: Bottom-mount			
⑰ Self-lubricator Standard Type	E: Self-lubricator Standard Type			

[Note] For LSD-BB series, standard length of a rail is 3 m.

Maximum length of two-joint rail is 6 m. Maximum length of three-joint rail is 9 m.

Please contact with our company if length of rail exceeds the maximum.

Add: Number of joints cannot be more than 2 times(three rails at most).

For LSD20/25, maximum length of jointed rail is 12080mm.

For LSD35, it's 12030.

Customization is needed for joint times more than standard.

Self-lubricator Standard Linear Guide




LSD Series


1. Block Order Information

LSD □ 15 BK - H N - H - D - AM6-E

1 2 3 4 5 6 7 8 9 10



S: Short



N: Standard

①Model Code	LSD:Self-lubricator Standard Linear Guide							
②Rail&Block surface treatment	Blank: Block without additional coating. (natural color) ★B: Block coated with black chrome							
③Rail Width	15:15mm	20:20mm	25:23mm	30:28mm	35:34mm			
④Block Code	BK: Block							
⑤Block Style	H: Square type F1: Flange type, Mounting from top F2: Flange type, Mounting from bottom F3: Flange type, Mounting from top or bottom							
⑥Block type	S: Short N: Standard							
⑦Accuracy	N: Normal H: High							
⑧Group code	SD		SC	SB	B	D [Note1]		
⑨Nipple /adapter type	15	M4	M4 Nipple		M6	M6 Nipple		
		AM6	M4 to M6		I type 	A01	M6 to PT1/8	I type 
		LM6	M4 to M6	L type 	20	AM8	M6 to M8	L type 
					25	L01	M6 to PT1/8	
					30	LM8	M6 to M8	
					35	SM6	M6 Nipple	
⑩Self-lubricator Standard Type	E:Self-lubricator Standard Type							

[Note1] When selecting rails and bearings, the different pairing codes can change the units preload, details see "preload pairing chart".

Self-lubricator Standard Linear Guide

LSD Series


Self-lubricator illustration

1.Code and structure

AirTAC provides self-lubricator for applications e.g. limited spaces, or where grease maintenance is challenging.

If needed, please add the code "E" after the product model.

E.g. LSD15HN1X220S20AH-AM6-B-T-E

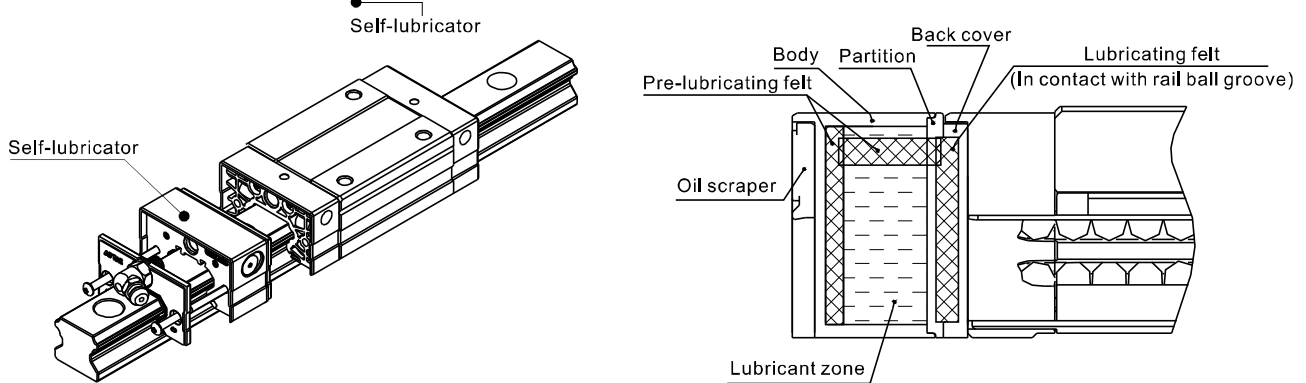

Product Features

- 1.Easy Maintenance and Long-Term Maintenance-Free Operation:** In normal applications, basically no additional grease maintenance is required throughout lifespan of linear guide.
- 2.Cost Savings:** No additional lubrication is needed for the block, reducing labor and material costs.
- 3.Flexible Use in Specific Environments:** Equipped with a high-capacity grease tank, allowing the use of specific lubricants for specific environments.
- 4.Dustproof Design:** Built-in dustproof structure extends lifespan.
- 5.Flexible in usage and installation:** the assembling and disassembling of self-lubricator in integrity structure is convenient, can have it according to different working condition.


[Note] Self-lubricator type block is not applicable for ultra-smooth application, as the higher viscosity of the lubricant in self-lubricator will increases friction by approximately 5–7N.

Durability test of self-lubricator

Test specification	Test specification	Model	Speed	Stroke	Lubricant type
	Lubricating effect	LSD20	30m/min	1200mm	ISO VG680 high-quality extreme pressure lubricant


Test result

Test result shows that after running 1,000 km, only 20% of the grease is consumed, and the linear guide remains lubricated. The expected service life can possibly exceed 4,000 km.

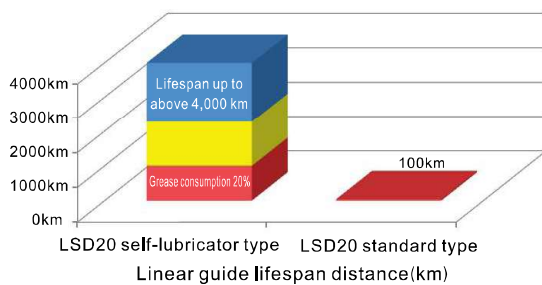

When comparing each sub-series with the self-lubricator and the standard model, the length of block will change. Please refer to the table below for details.

- Block dimension comparison (only dimension C is different from the standard, the rest remains the same)

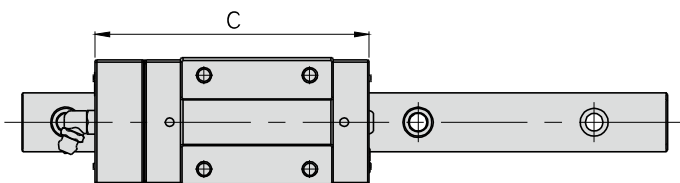

Model	Type	Length C(mm)	
		Standard (Blank)	Self-lubricator Standard Type
LSD15□S	Short	40.5	55
LSD15□N	Standard	57	71.5
LSD20□S	Short	46	62
LSD20□N	Standard	65	81
LSD25□S	Short	59	75
LSD25□N	Standard	83	99
LSD30□S	Short	68.5	84.5
LSD30□N	Standard	97	113
LSD35□S	Short	73.5	89.5
LSD35□N	Standard	106.5	122.5