

MVHB-260 series

HAND LEVER VALVE



Mindman



Technical data



Caution for safety
(Read before installing)



Specification

Model	MVHB-260(V)-4TV MVHB-260(V)-4TV-SP	MVHB-260(V)-4TV* MVHB-260(V)-4TV*-SP
Bore No.	8A	
Port size	1/4	
No. of port	5	
No. of position	2	3
Medium	Air	
Operating pressure range	0~0.8 MPa	
Effective orifice	18 mm ²	
Ambient temperature	-5~+60°C (No freezing)	
Weight	219 g	278 g

Order example

MVHB - 260V - 4TVC - SP - □ - G

MODEL

BODY WIDTH

4: 4way (5 port)

VALVE TYPE

Blank: 5/2

C: Closed center (5/3)

P: Pressure center (5/3)

R: Exhaust center (5/3)

SPRING RETURN

DUST COVER MATERIAL

Blank: NBR

E: EPDM

*1,2

PORT THREAD

Blank: Rc thread

G: G thread

NPT: NPT thread

Blank: Standard type
V: Vertical type


* Vertical type can be used with
MVSE-260 manifold

*1. NBR: Good oil resistance and abrasion resistance, not suitable for using in polar solvents.


EPDM: Excellent water resistance and chemical resistance, not suitable for using oil place.

*2. Suitability of material


4TV




4TV-SP




4TVC




4TVP




4TVR







4TVC-SP



4TVP-SP



4TVR-SP

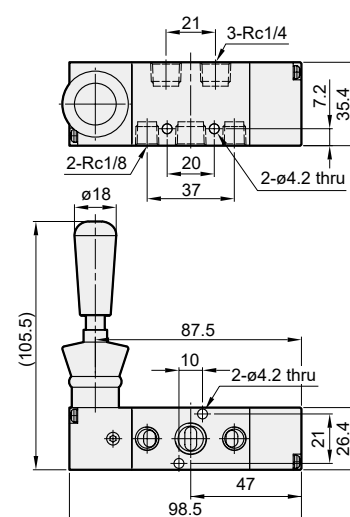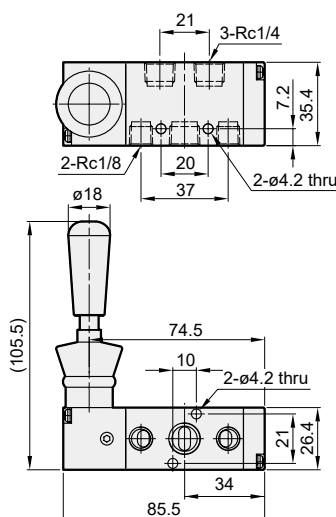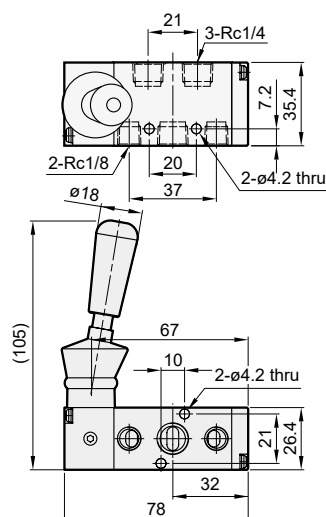


MVHB-260 Dimensions – Vertical type

HAND LEVER VALVE





V

4TV




4TV-SP

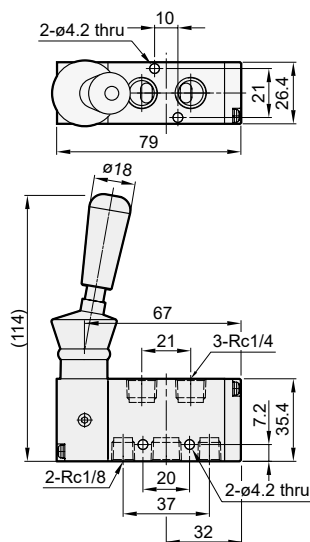


V



4TVC



4TVP




4TVR

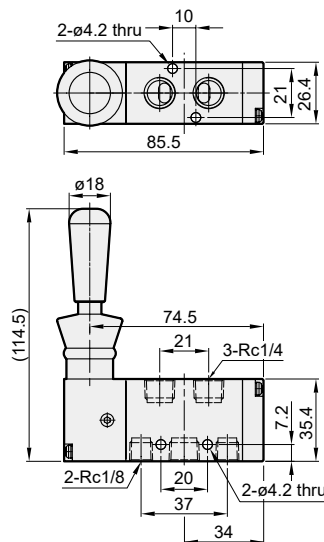


V

4TVC-SP



4TVP-SP



4TVR-SP

