

MVSE-600 series

SOLENOID VALVE



Selection table



Technical data



Caution for safety
(Read before installing)



Specification

Model	4E1	4E2
Bore No.	20A, 25A	
Port size	3/4, 1	
No. of port	5	
No. of position	2	
Medium	Air	
Operating perssure range	0.2~0.7 MPa	
Proof pressure	1 MPa	
Effective orifice	20A: 96 mm ² , 25A: 100 mm ²	
Reponse time	80 ms	
Ambient temperature	-5~+50°C (No freezing)	
Voltage	AC110V, 220V (50/60)Hz, DC24V	
Power consumption	AC=13/11VA, DC=10W	
Available voltage range	±10%	
Insulation class	H class	
Weight	1817 g	2102 g

Order example of valve

MVSE — 600 — 4E2 — 25A — AC110 — L — G

MODEL

BODY
WIDTH

4: 4 way (5 port)

BORE SIZE

20A: 3/4
25A: 1

VOLTAGE

AC220V(50/60)Hz
AC110V(50/60)Hz
DC24V


PORT THREAD

Blank: Rc thread
G: G thread
NPT: NPT thread

ELECTRIC CONNECTION

Blank: DIN terminal
L: DIN terminal with LED indicator

Flow features




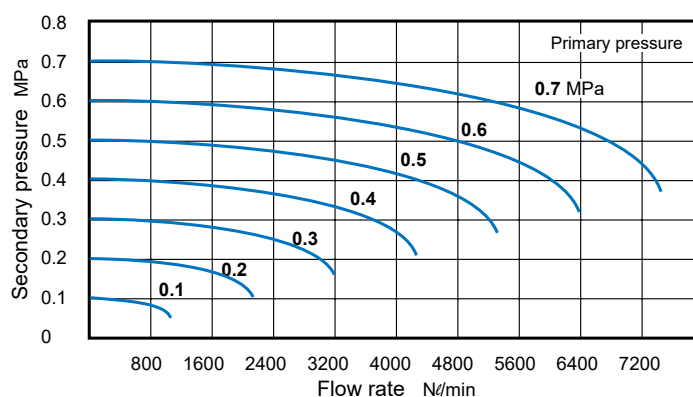


MVSE-600 Dimensions

SOLENOID VALVE



MVSE-600-4E1

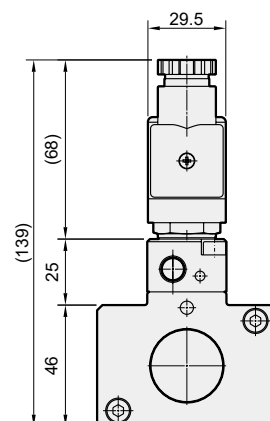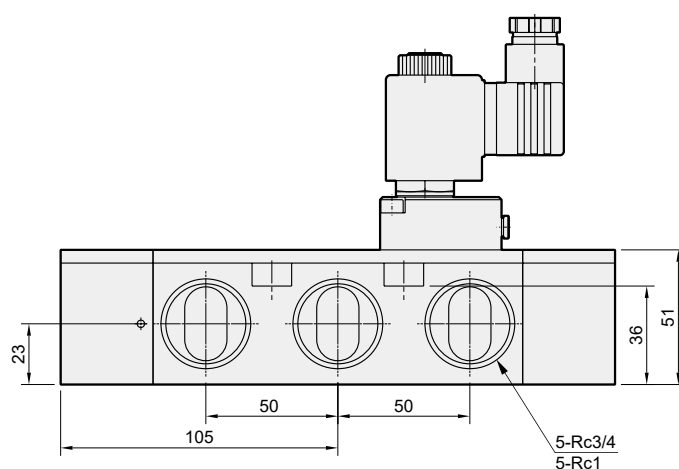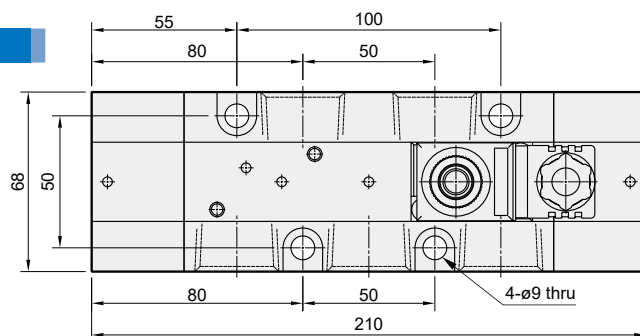

MVSE-600-4E2

