

MVSI-510 series

ISO-3 SOLENOID VALVE



Mindman



Selection table



Technical data



Caution for safety
(Read before installing)



Specification

Model	4E1	4E2
No. of port	5	
No. of position	2	
Medium	Air	
Operating pressure range	0.2~0.7 MPa	
Proof pressure	1 MPa	
Effective orifice	65 mm ²	
Reponse time	60 ms	
Ambient temperature	-5~+50°C (No freezing)	
Voltage	AC110V, 220V (50/60)Hz, DC24V	
Power consumption	AC=13/11VA, DC=10W	
Available voltage range	±10%	
Insulation class	H class	
Weight	1493 g	1778 g

Order example of valve

MVSI — 510 — 4E2 — AC110 — L

MODEL

BODY
WIDTH

VOLTAGE

AC220V(50/60)Hz
AC110V(50/60)Hz
DC24V


ELECTRIC CONNECTION

Blank: DIN terminal
L: DIN terminal with LED indicator

4: 4 way (5 port)

E1: Single Solenoid
E2: Double Solenoid

Flow features




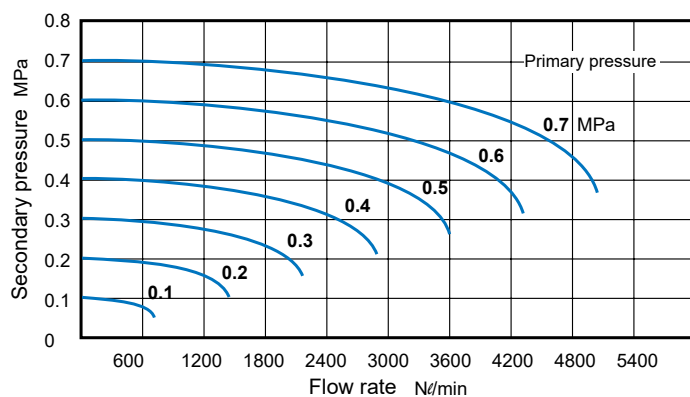


MVSI-510 Dimensions





ISO-3 SOLENOID VALVE



MVSI-510-4E1

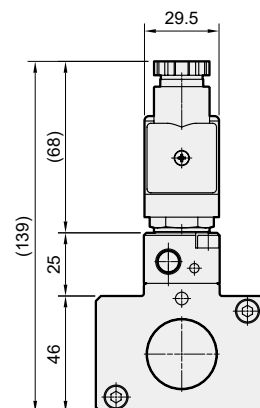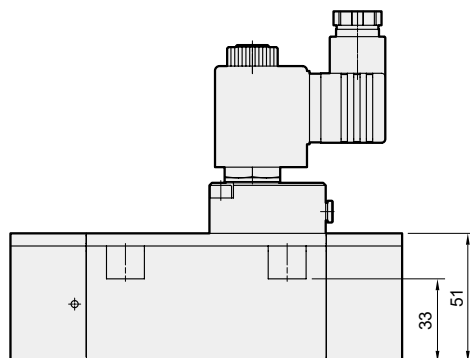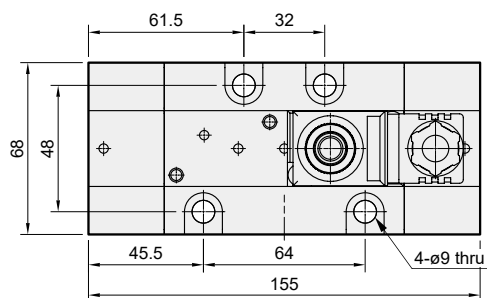

MVSI-510-4E2

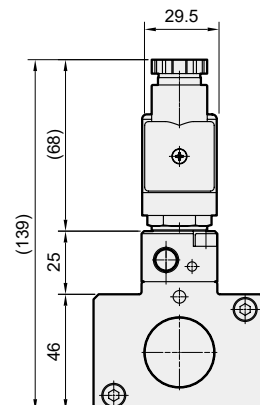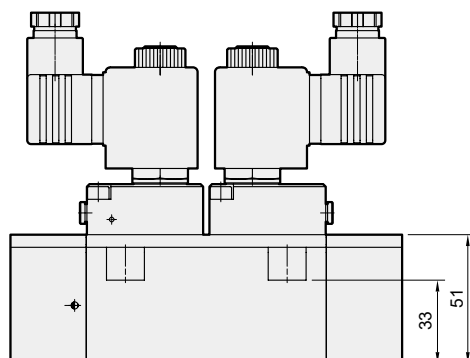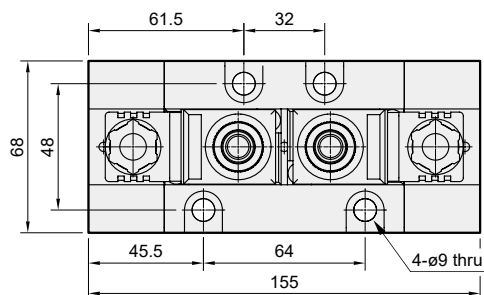

Accessories

