

MVSN2-300 series

NAMUR SOLENOID VALVE



Mindman



Features




Selection table



Technical data



Caution for safety
(Read before installing)

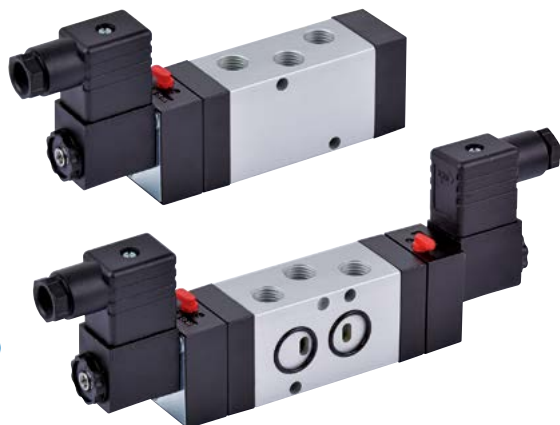


Specification


Model	4E1	4E2	4E2C
Bore No.	8A		
Port size	G1/4		
No. of port	5		
No. of position	2		3
Medium	Air		
Operating pressure range	0.25~1 MPa	0.15~1 MPa	0.3~1 MPa
Flow (*)	1080 NI/min		800 NI/min
Reponse time	50 ms		
Ambient temperature / Fluid temperature	HHT : -10~+120°C / 0~+50°C HHT : -35~+50°C / -10~+40°C		
Voltage	AC230V, 115V, 24V(50/60)Hz, DC24V, 12V		
Power consumption	AC=5VA, DC=3W		
Available voltage range	±10%		
Insulation class	HHT : H class, LLT : F class		
Weight	410 g	450 g	510 g

* The flow rate is the value when the intake pressure is 0.6 MPa, the temperature is 20°C, and the pressure drop $\Delta P=0.1$ MPa.

Order example of valve

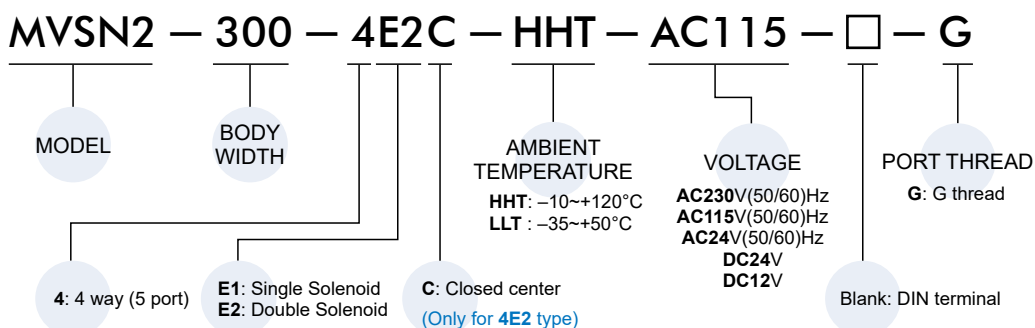


Order example of adapter

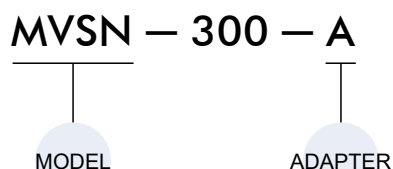

* Use the same adapter with MVSN-300

Flow features

MVSN2-300


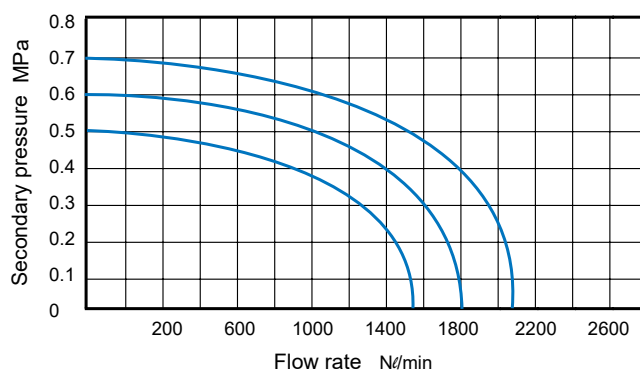


MVSN2-300 Dimensions



NAMUR SOLENOID VALVE



MVSN2-300-4E1

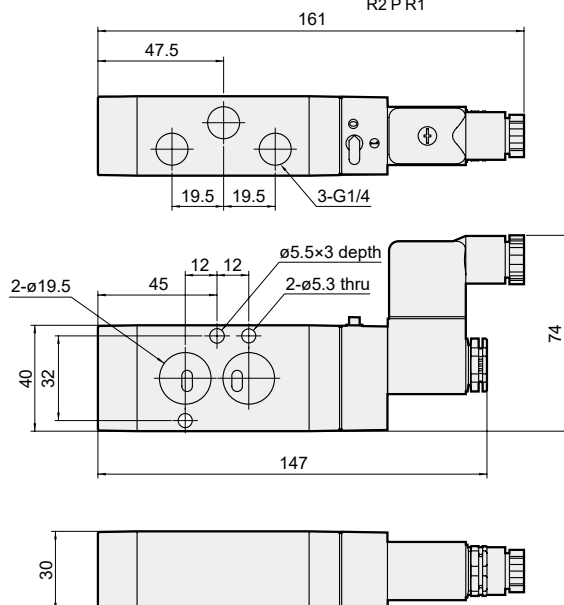

MVSN2-300-4E2

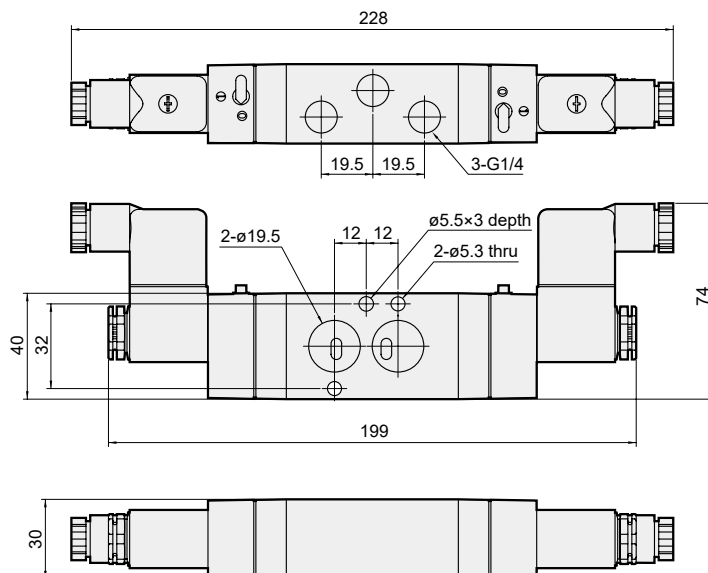

MVSN2-300-4E2C

