

MVSY-100 series

SOLENOID VALVE



Mindman



Selection table



Blocking plate



Technical data



Caution for safety
(Read before installing)




Specification

Model		4E1	4E2	4E2 C.P.R
Bore No.		M5		
Port size		M5×0.8		
No. of port		5		
No. of position		2		3
Medium		Air		
Operating perssure range		0.2~0.7 MPa		
Operating perssure (LP)		0.0~0.7 MPa		
Pilot pressure range (LP)		0.25~0.7 MPa		
Proof pressure		1 MPa		
Effective orifice	Body ported	4.5 mm ²		
	Manifold	4.5 mm ²		4.5 / 5 / 4.5 mm ²
Reponse time		15 ms		
Ambient temperature		+5~+50°C		
Max. operating frequency		5 Hz		
Voltage		AC110V, 220V (50/60)Hz, DC24/12/6V		
Power consumption		AC=1.6/2.5VA, DC6=1.2W, DC12/24=0.55W		
Available voltage range		±10%		
Insulation class		B class		
Weight (g)	Valve	30	44	59
	Manifold	5B: 14n+42, 5M: 46n+87 (n: Stations)		


Order example of valve

MVSY — 100M — 4E2C — AC110 — LJ1 — LP

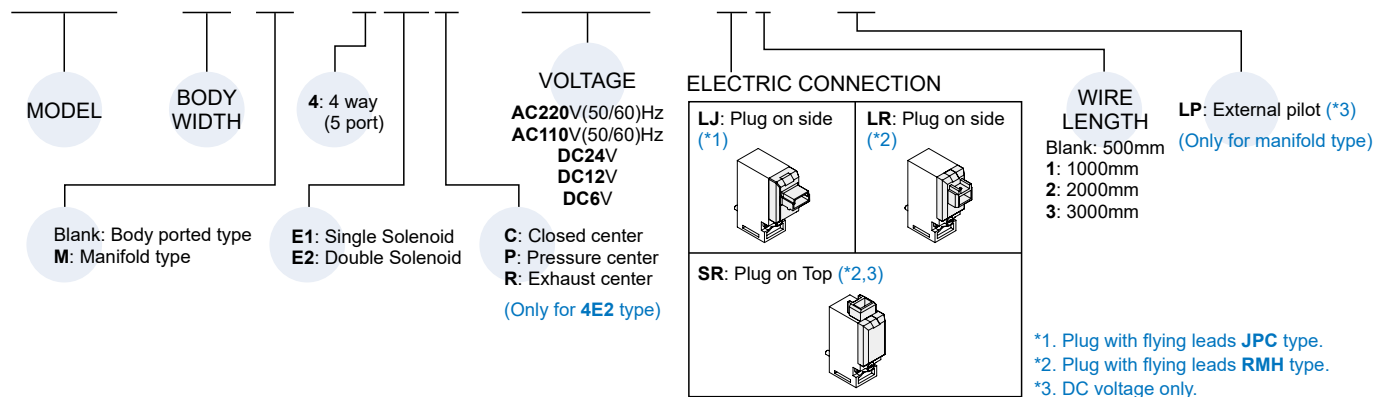

Order example of manifold


MVSY — 100M — 5B3 — LP — G

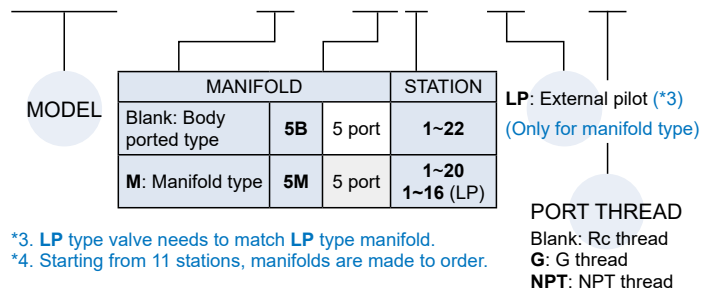

Order example of wire

* Use the same wire with MVDY.

MVDY — 100 — WA2J2




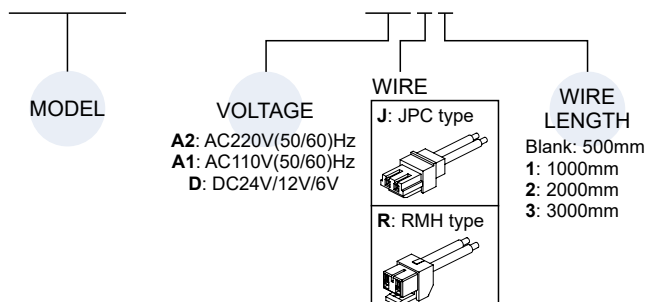


MVSY-100 Dimensions





SOLENOID VALVE



MVSY-100-4E1

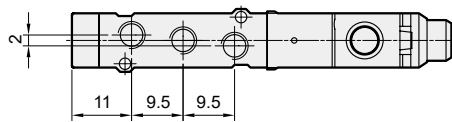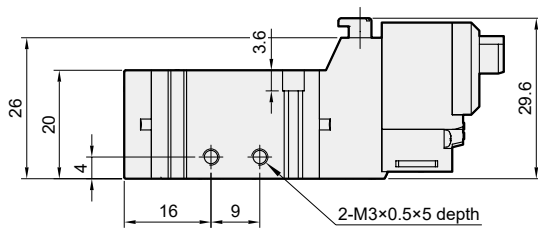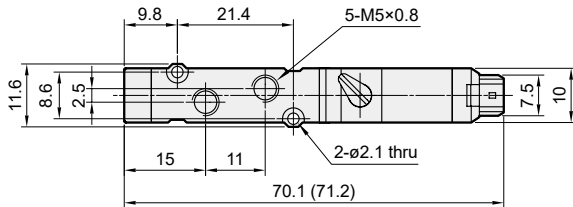

MVSY-100-4E2



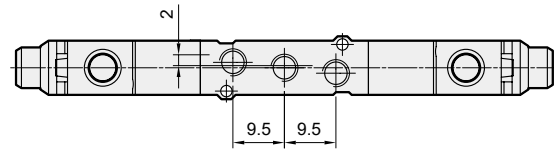
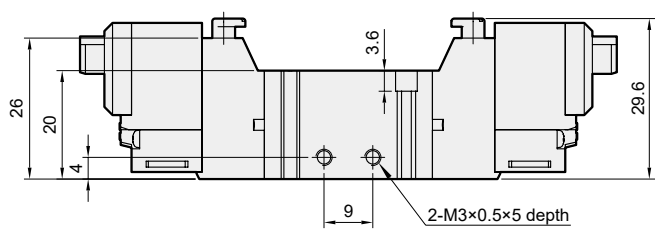
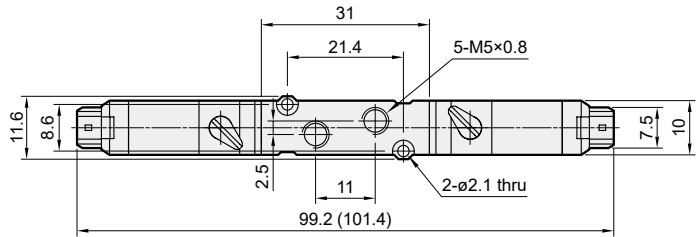



MVSY-100-4E2C.PR

MVSY-100-4E2C


MVSY-100-4E2P

MVSY-100-4E2R

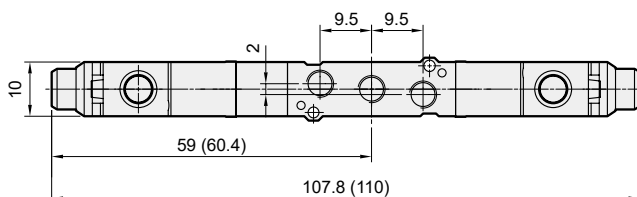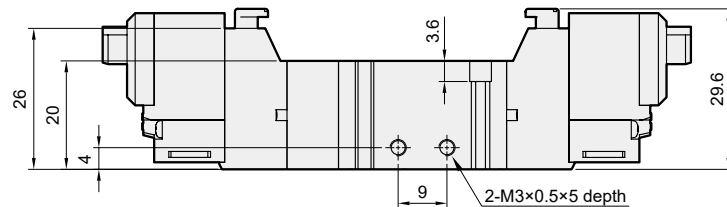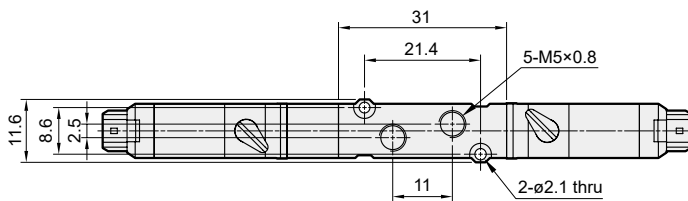

Flow features

MVSY-100-4E1/4E2

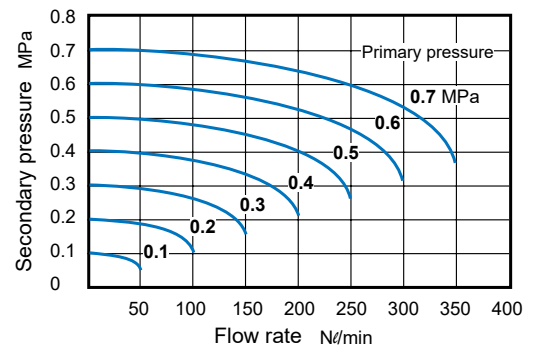

(): Dimension for LJ plug type.

MVSY-100 Manifold

SOLENOID VALVE




MVSY-100-5B*

5 port (for body ported type)

No. of stations	P	L
1	20	38
2	30.5	48.5
3	41	59
4	51.5	69.5
5	62	80
6	72.5	90.5
7	83	101
8	93.5	111.5
9	104	122
10	114.5	132.5

P: (No. of stations-1)×10.5+20

L: (No. of stations-1)×10.5+38


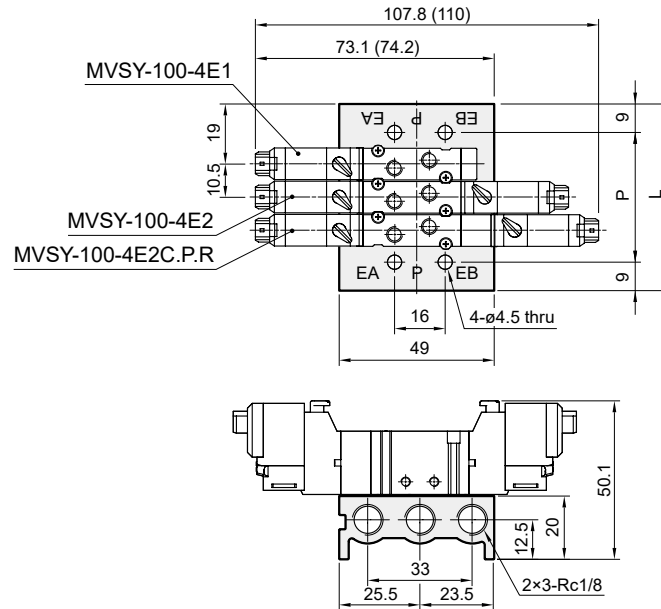


MVSY-100M-5M*

5 port (for manifold type)

LP

External pilot

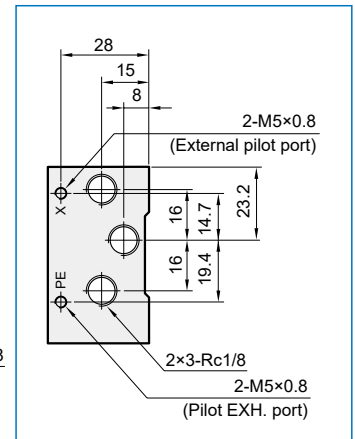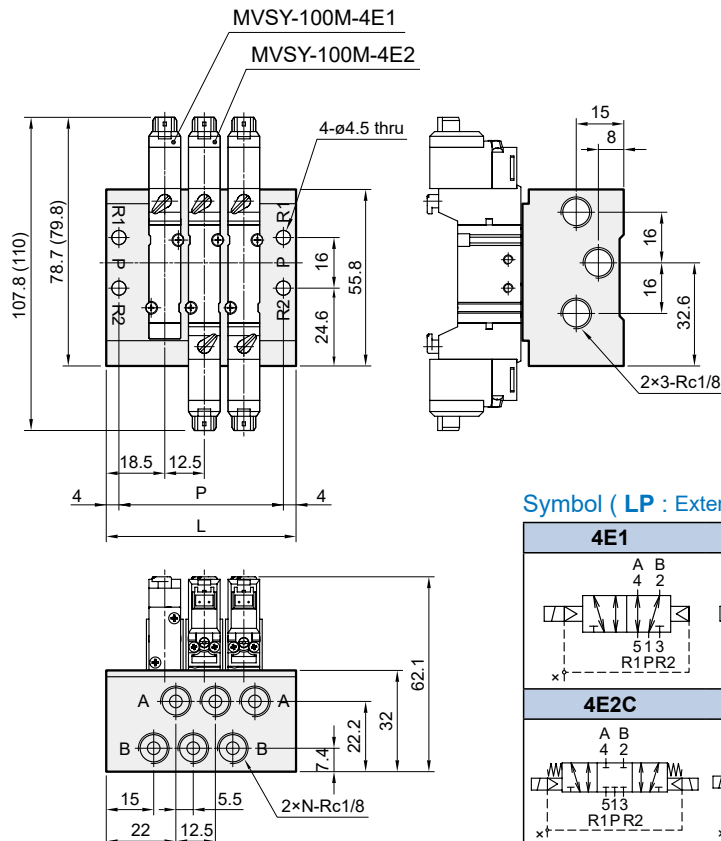


No. of stations (N)	P	L
1	27	35
2	39.5	47.5
3	52	60
4	64.5	72.5
5	77	85
6	89.5	97.5
7	102	110
8	114.5	122.5
9	127	135
10	139.5	147.5

P: (No. of stations-1)×12.5+27

L: (No. of stations-1)×12.5+35

Symbol (LP : External pilot)

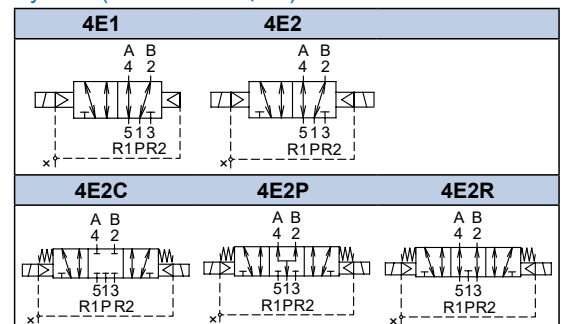

() : Dimension for LJ plug type.

MVSY-100 Mounting bracket

SOLENOID VALVE



Order example of bracket





MVSY — 100 — 1A

MODEL





MOUNTING BRACKET

1A
2A

MVSY-100-1A

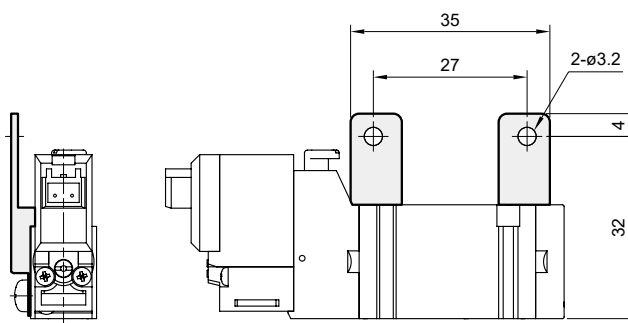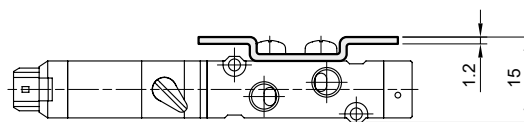

MVSY-100-2A

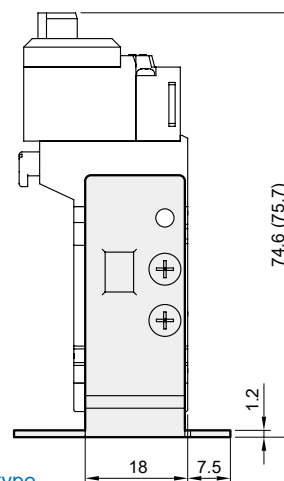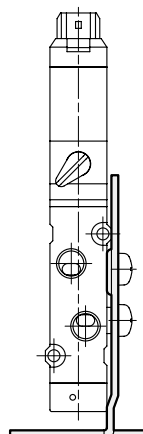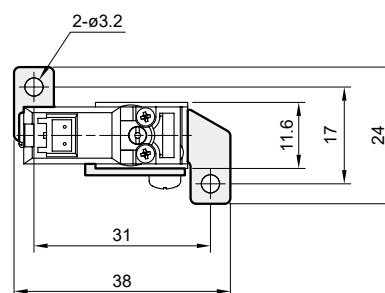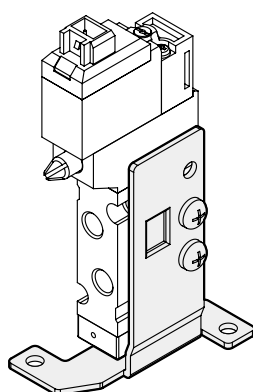

() : Dimension for LJ plug type.

MVSY-100 Spacer assembly

SOLENOID VALVE




Mindman

for body ported type


MVSY-100-5BP

Individual SUP spacer assembly

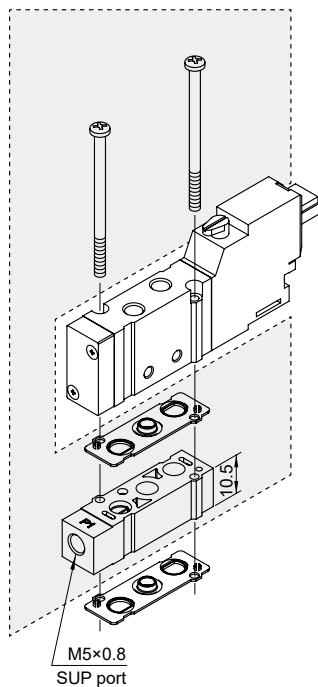


MVSY-100-5BR

Individual EXH spacer assembly

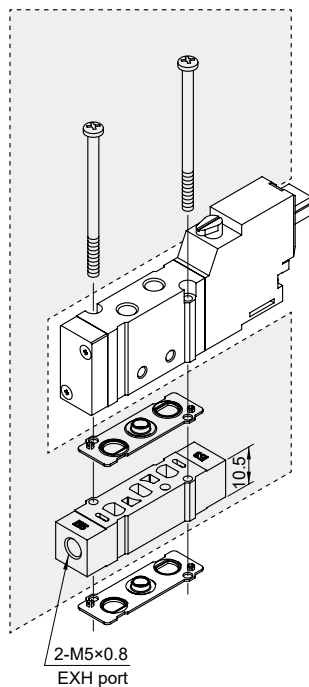

MVSY-100-5BPR


Individual SUP spacer assembly+
Individual EXH spacer assembly

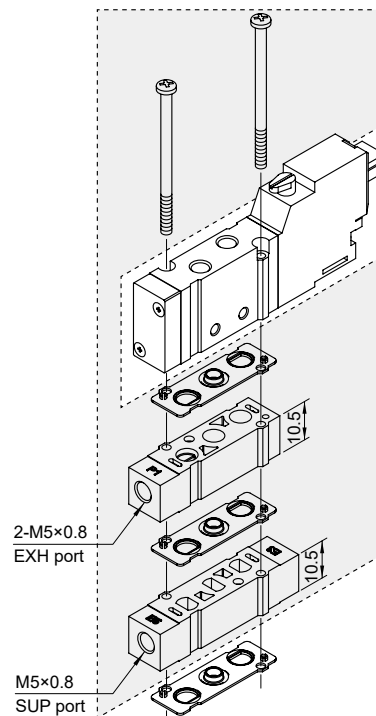

for manifold type


MVSY-100M-5MP

Individual SUP spacer assembly

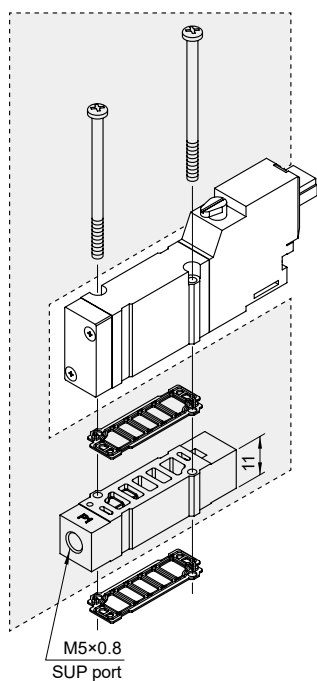

MVSY-100M-5MR

Individual EXH spacer assembly

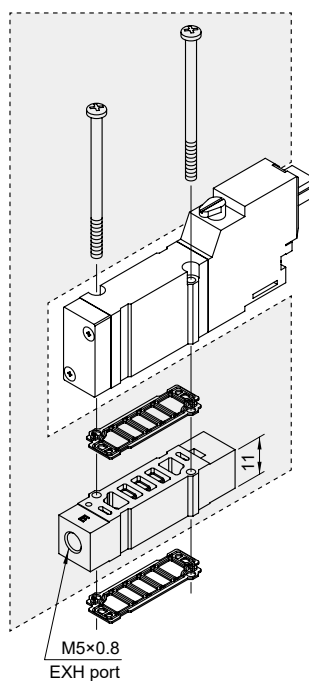

MVSY-100M-5MPR

Individual SUP spacer assembly+
Individual EXH spacer assembly

